


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

SECTION 34, T15N, R2W
MONROE/VERNON COUNTY, WISCONSIN

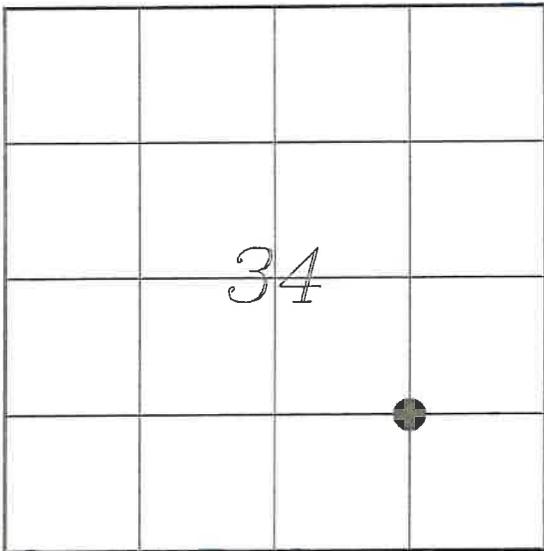

LOCATION OF LANDMARK

MONROE COUNTY COORDINATE SYSTEM	
Northing	301411.670
Easting	682771.665
VERNON COUNTY COORDINATE SYSTEM	
Northing	212342.113
Easting	779220.674
Datum	NAD 1983 (2011)
TYPE OF LANDMARK: Set Lunde Monument 4" Brass Capped Iron Pipe	
BEARINGS ARE REFERENCED TO: Vernon County Coordinates (Survey Grade)	

Witnesses: Laurence E Johns III
Doug Avoles

Adjust Bearings +00°05'49"
To Convert to Monroe County

Date: 12 June 2019

Describe or show any material discrepancy between the location of the restored corner and that of the corner previously restored or re-established.

F Curtis Crook shows that he set this corner during a survey in July 1993. He shows he set a 3/4" iron rod.

Describe any record evidence, monument evidence, testimonial evidence or any other material evidence you considered and whether the monument was found or restored through acceptance of an obliterated evidence location.

This corner was made part of the County Line between Monroe & Vernon County on June 26, 1939. It was not surveyed at that time.

Crook was the first to establish this corner during his survey.


I could not find his monument. It does fall in a wooded area and I can only assume that at some point it was logged and destroyed at that time.

I re-established this corner using Crook's survey and not by protracting the section.

I placed a Lunde monument to mark this corner.


RECORD OF DURABLE WITNESS MONUMENTS

NO	DESCRIPTION	BEARING	DISTANCE
1	Existing 3/4" Iron Rod	N 10° 17' 38" W	130.17'
2	Set 3/4" x 18" Iron Rod 2' West of a 24" Elm	N 63° 07' 17" E	31.78'
3	Set 3/4" x 18" Iron Rod 3' West of a 12" Elm	S 26° 52' 55" W	42.69'
4	Set 3/4" x 18" Iron Rod 2' West of a 10" Maple	S 55° 39' 06" E	49.64'

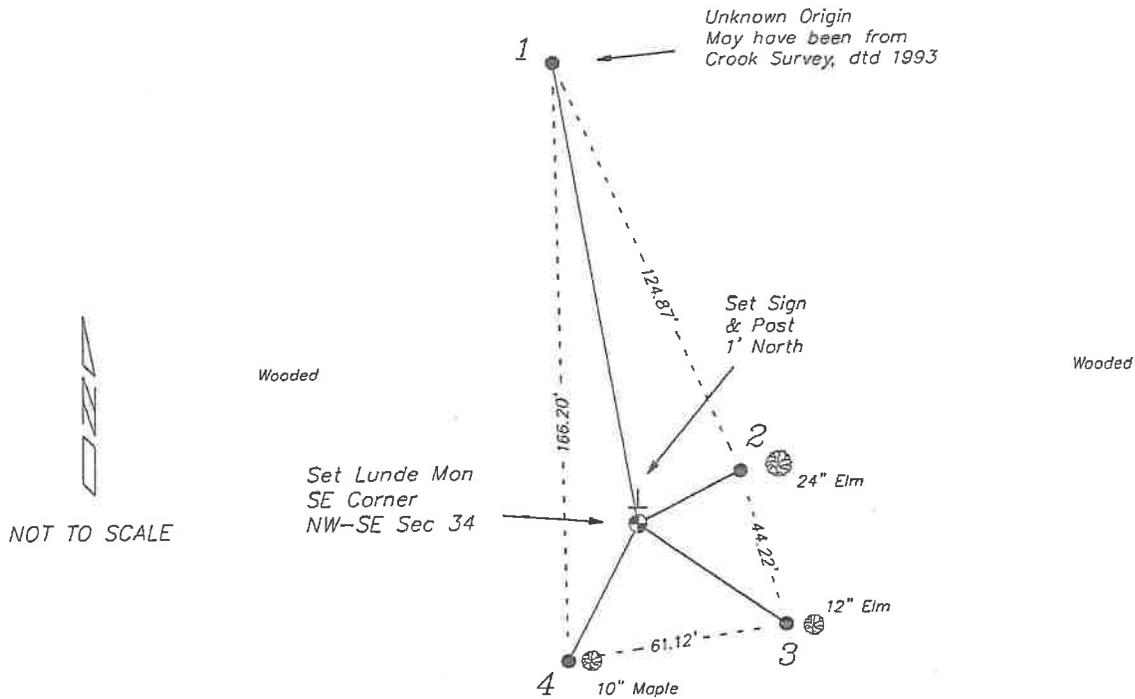

PLAN VIEW DRAWING OF REFERENCE TIES

Map Showing Distance And Direction To Other Public Land Survey
Corners Used For Re-Establishing The Corner

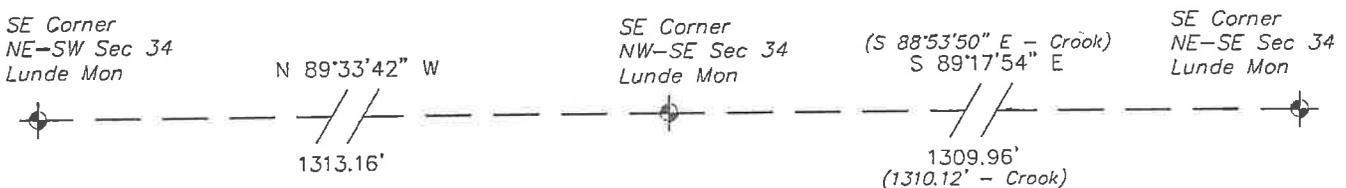

I, Laurence E Johns III PLS 2804, Professional Land Surveyor, hereby certify that the corner location shown on this record was determined by me or under my direction and control, and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

