CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013

Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

No. 21703201030

History of corner established since Original Government Survey

The 1940's McCoy boundary notes show a corner at this location. In 1994, Garold A. Sime set a 3/4 inch x 24 inch iron bar for the corner while completing a survey of the SE 1/4 of the SW 1/4 of Section 20 of record, Vol. 9 CSM 157. Sime notes on his survey that the previous McCoy monument is 35 feet north and 2 feet east of his corner. Sime's section breakdown math fits the center of section as being derived by doubling over the direction and distance from the W 1/4 corner to his CW 1/16 set in 1976.

Description of evidence found

On September 12th, 2012, Anderson Engineering of Minnesota located the 3/4 inch iron bar 0.4 feet below grade and 46 feet west of the centerline of the trail. The McCoy monument was also located, a 4 inch U.S. Army Corps of Engineers survey control mark disk. On April 23rd, 2013, Anderson Engineering of Minnesota replaced the solid bar with a 30 inch Berntsen aluminum dig monument with a 3 1/4 inch aluminum cap, stamped "FORT MCCOY BOUNDARY" "2013" "ANDERSON ENG. OF MN." The old McCoy monument is now utilized as a witness corner.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re–established location of this corner:

Witnesses to corner location:
Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

MCCOY DIG MONUMENT
Northing (Y) 375180.81
Easting (X) 638472.12

Base Station – 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

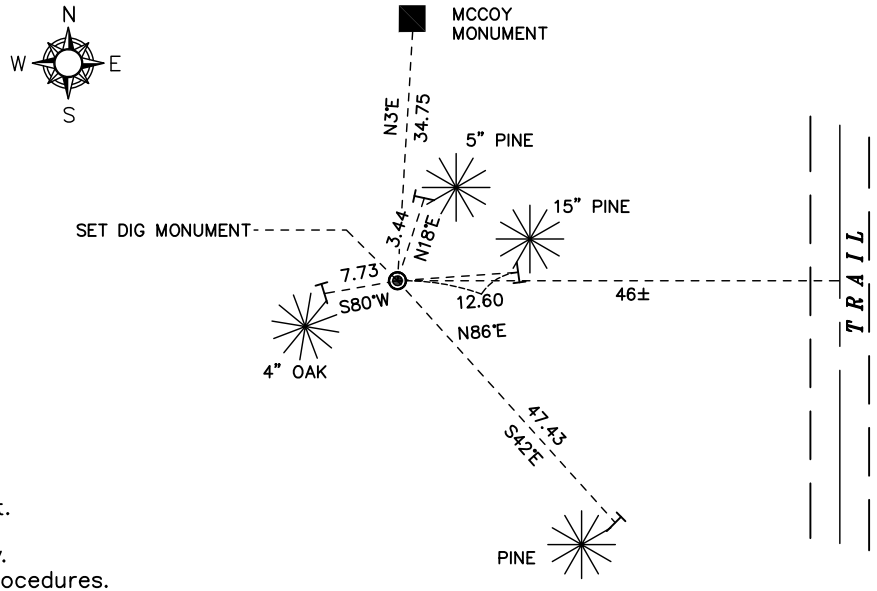



◉= LOCATION CORNER

Corner I.D. SW 1/16 20

T 17 N R 3 W

Town of Angelo

Monroe County, WI.

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

2013 FORT MCCOY BOUNDARY SURVEY

17.3.50