

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

The 1940's McCoy boundary notes show a corner at this location. In 1976 Garold A. Sime set a 1 1/4 inch x 30 inch iron bar for this corner while completing a survey for Mike Weber of record, Vol. 8 CSM 163.

Description of evidence found

On September 12th, 2012, Anderson Engineering of Minnesota located the 1 1/4 inch iron bar flush with the ground. Remnants of a down barbed wire fence that run north and west remain. On April 23rd, 2013, Anderson Engineering of MN replaced the iron rod with a 30 inch Berntsen aluminum dig monument with a 3 1/4 aluminum cap, stamped "FORT MCCOY BOUNDARY" "2013" "ANDERSON ENG. OF MN."

No. _____
21703202030

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer
Josh Oslund
Dan Greenwald



MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

MCCOY DIG MONUMENT
Northing (Y) 376510.40
Easting (X) 638461.85

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00



All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

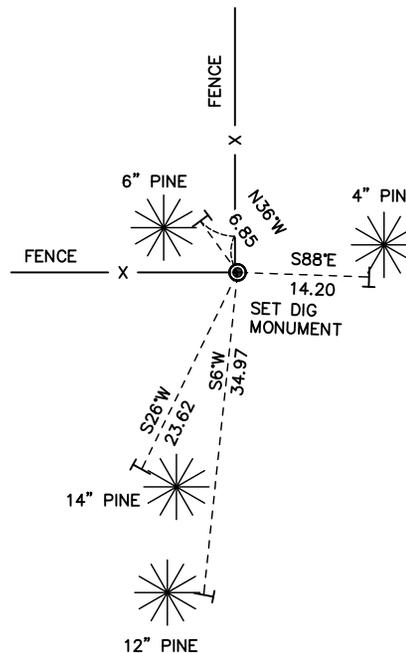

● = LOCATION CORNER
Corner I.D. CW 1/16 20
T 17 N R 3 W
Town of Angelo
Monroe County, WI.