

**U.S. PUBLIC LAND CORNER
MAINTENANCE**


56 B
Corner ID: C1/4 Sec. 16, T18N-R1W
21801162020

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u>
September 20, 2019	Zachariah P. Dechant Gary L. Dechant	Existing mag nail at Embay Ave/ USH "12" intersection 12' west of centerline USH 12. Fits 1993 ties.

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4x24" round iron bar, east of USH 12, 11.5'N & 1.5'W of fence corner, (chain link fence)	N56E	86.83'
2) Set 3/4x24" round iron bar, down 6", on east bank of wide ditch east of "12"	S30E	152.60'
3) Set 3/4x24" round iron bar, down 6", 2' south of east corner of "Whispering Pines" sign	S56W	73.99'
4) Set 3/4x24" round iron bar, down 6", 3' west of 18" Spruce	N30W	54.99'

Corner and reference markers set on straight lines.

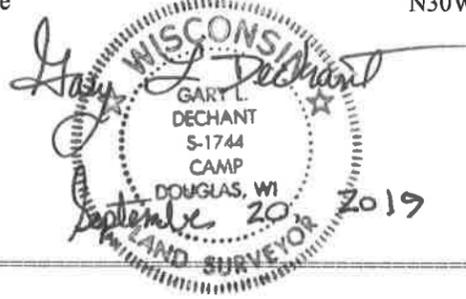

CERTIFICATE

CERTIFIED LAND CORNER

No. 56B
See Pg. 2

I, Harley A. Sime, do hereby certify that on the 7th day of October 19 75, I found (evidence) ~~(no evidence)~~ of the Center 1/4 corner of Section 16, T 18 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 10th day of Feb. 19 76.

Harley A. Sime
County Surveyor
Title

History of original corner establishment:

Description of corner evidence found:

Found a 3/4" bolt used in several previous surveys. Said bolt fits the section quite well in a North-South direction, but there is a bad "kink" in bearing in the East-West direction. Accepted the bolt so as to reduce future title problems in regards to survey work done in the past.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:




Found a 3/4" bolt along the West edge of Hwy. "12" and in the centerline of an E-W Town Road.

Witnesses to corner location:

W.C. Jung-Crew Chief W.C. Jung

A. Tueck

D. Malliet

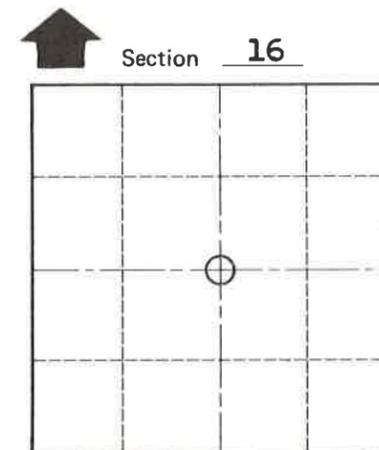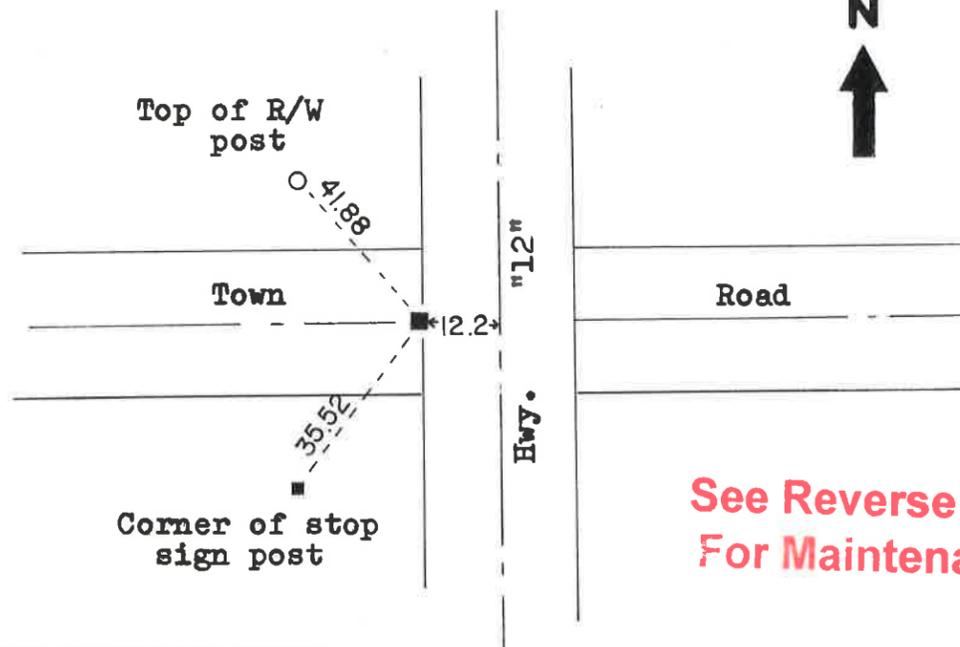

O = LOCATION CORNER
T 18 N R 1 W
WISCONSIN

See Reverse Side For Maintenance

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange

County of Monroe

I, Harley A. Sime, do hereby certify that on the 7th day of October 1975, I found (evidence) ~~(no evidence)~~ of the Center 1/4 corner of Section 16, T 18 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 10th day of Feb. 19 76.

[Signature]
County Surveyor
Title

History of original corner establishment:

Description of corner evidence found:

Found a 3/4" bolt used in several previous surveys. Said bolt fits the section quite well in a North-South direction, but there is a bad "kink" in bearing in the East-West direction. Accepted the bolt so as to reduce future title problems in regards to survey work done in the past.

UPDATE: A resurfacing project was to take place in the summer of 1993. Prior to construction, the new ties were established and the bolt removed. Following the resurfacing project, a 1/4"x12" round iron bar was set at the corner location.



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



1993 CREW: Bryan Meyer, Rick Lobe
July, 1993

Witnesses to corner location:

W.C. Jung-Crew Chief W.C. Jung

A. Iueck

D. Malliet

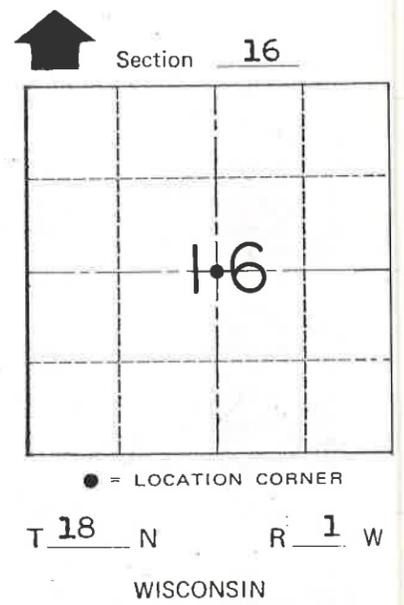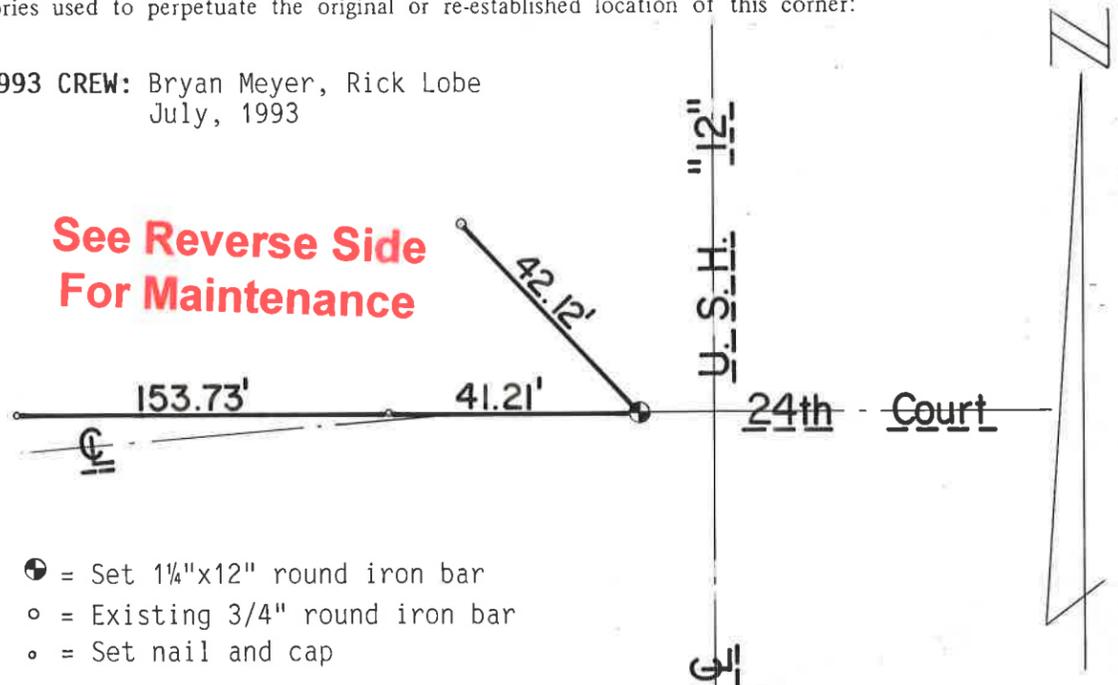

- = Set 1/4"x12" round iron bar
- = Existing 3/4" round iron bar
- = Set nail and cap

SURVEY CONTROL ORDER

Horizontal _____

Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange
County of Monroe

COUNTY SURVEYOR FORM NO. 1