

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 21st day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

Fred A. Holden was here in August of 1911 and states in his notes that there is an old stake in a stone pile. In 1985 Gary L. Dechant found an unrecorded well point in a pile of stones. Dechant accepted it as the corner as it fits Holden's distance to the quarter corner to the north very well. History of the well point is unknown, but the stone pile seems to be the same one referred to in Holden's survey of 1911. Dechant set a Harrison monument in place of the unrecorded well point.

Description of evidence found

On February 25th, 2013, Anderson Engineering of Minnesota located the Harrison monument 0.3 foot above grade and 1.4 feet west of a wood post.

No. 21902320000

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Witnesses to corner location:

Nick Hillmer
Josh Oslund
Dan Greenwald


MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 426225.11
Easting (X) 673289.20

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

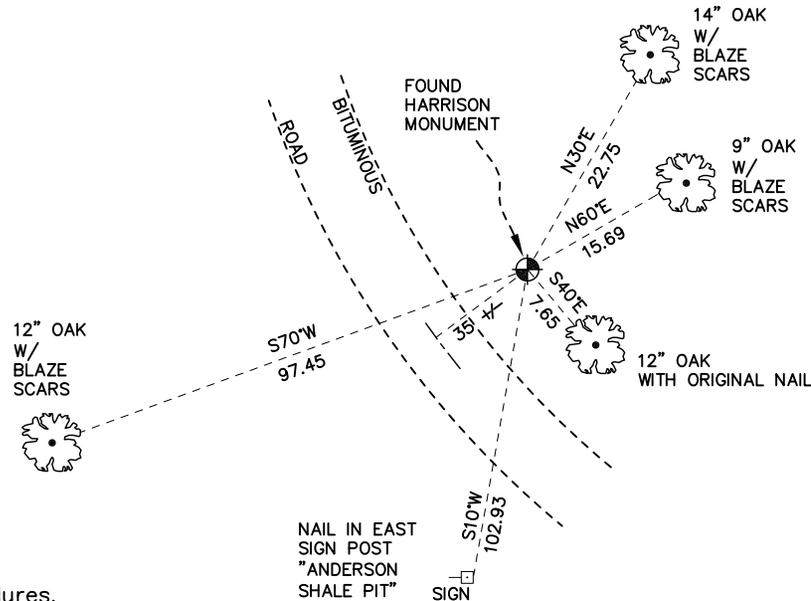

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.



⊙ = LOCATION CORNER
Corner I.D. SE 32
T 19 N R 2 W
Town of Grant
Monroe County, WI.

CERTIFICATE

CERTIFIED LAND CORNER

No. 129

21902320000

Gary L. Dechant
 WISCONSIN
 GARY L. DECHANT
 S-1744
 CAMP
 DOUGLAS, WI
 LAND SURVEYOR
December 17, 1985

I, Gary L. Dechant, do hereby certify that on the 16th day of December 19 85, I found (evidence) ~~(no evidence)~~ of the SW corner of Section 33, T 19 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 17th day of Dec. 19 85.

Gary L. Dechant
 Registered Land Surveyor-1744
 Title

History of corner establishment since Original Government Survey


Fred Holden was here in August of 1911 and states in his notes that there is an old stake in stone pile.

Description of corner evidence found:

Found an unrecorded well point in pile of stones. Accepted as corner as it fits Holden's distance to $W\frac{1}{4}$ very well. History of the well point is unknown, but stone pile seems to be one and the same as referred in Holden's survey of 1911.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Windy & cold, $5^{\circ}\pm$
 3:05 P.M.
 2.5' snow cover





Witnesses to corner location:

Lawrence A. Feddersen

Gary L. Dechant

COUNTY SURVEYOR FORM NO. 1

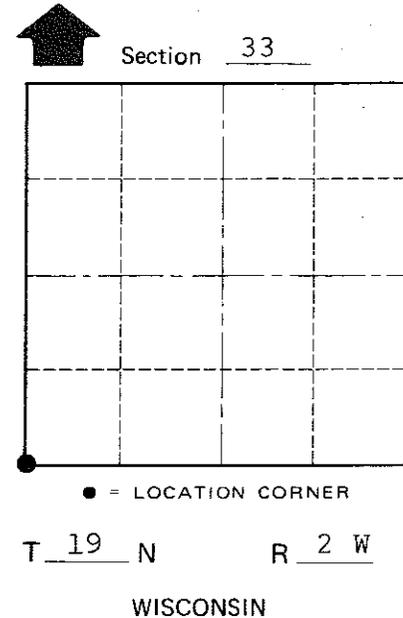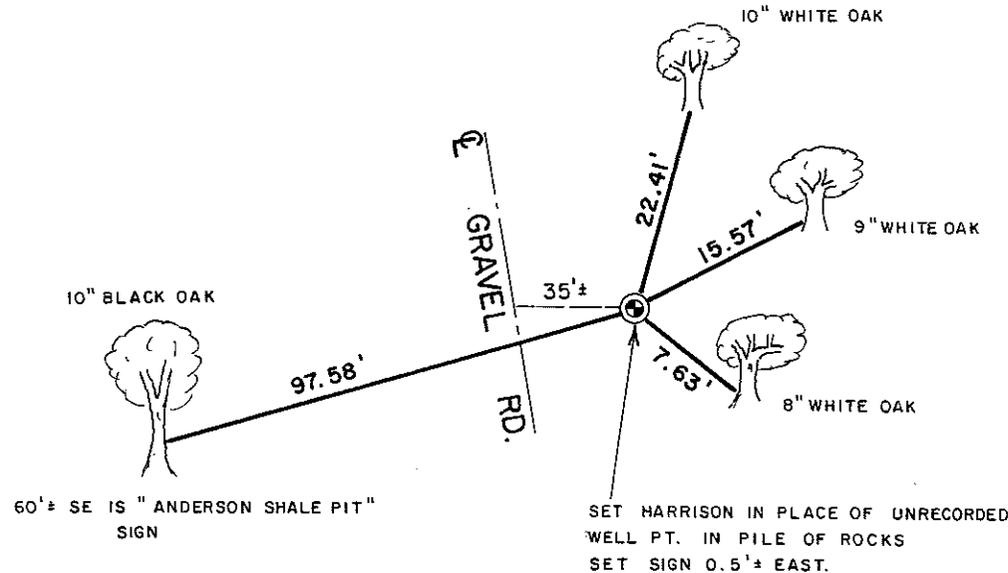

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

(Trees double blazed with N&C's set)

City, Village or Town Grant
 County of Monroe