


**U.S. PUBLIC LAND CORNER
MAINTENANCE**

51

**Corner ID: SE Sec. 7, T17N-R3W
21703070000**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT INFO</u>
February 28, 2020	Zachariah P. Dechant Gary L. Dechant	Existing Harrison, intact, down 6", center line of Hawley Road fence running west, approx.. 145' north of railroad

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" round iron bar, 1' SW of address sign post, 14980/14982	N20E	55.10'
2) Set 3/4"x24" round iron bar, on line with 4 large Jack Pines 11' north	East	49.52'
3) Set 3/4"x24" round iron bar, 4' NE of 6" Jack Pine, double blazed	S66W	49.60'
4) Set 3/4"x24" round iron bar, 3' east of 4" Jack Pine, double blazed	N84W	44.31'

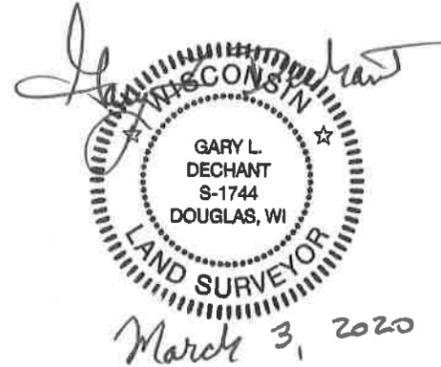

I, William C. Jung, do hereby certify that on the 3rd day of June 1981, I found (evidence) (~~no evidence~~) of the SW corner of Section 8, T 17 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 24th day of Sept. 1981.

William C. Jung, R.L.S. 1323

County Surveyor's Office

Title

and that the North R/W line of this road is the section line. The corner I accepted would put the section line on the North line of the road as called for. Our records show a distance, between the East 1/4 of Sec.18 and the corner I accepted, of 2659.34 (Pietz) and 2656.63 (Zietlow). We have a distance of 2655'± between the SE and East 1/4 corners of Section 18. Therefore, the newly accepted section corner fits the East line of Section 18 very well. The old R.R. map shows this corner as being 3000' North of the R.R. centerline. Zietlow measured 3004'±. The measurement from the the accepted corner now is about 5219' to the section corner at the N.W. of Sec.8. 5219±

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

fore, the newly accepted section corner fits the East line of Section 18 very well. The old R.R. map shows this corner as being 3000' North of the R.R. centerline. Zietlow measured 3004'±. The measurement from the the accepted corner now is about 5219' to the section corner at the N.W. of Sec.8. 5219±


Witnesses to corner location: From my section corner North to an old downed fence that used to go to $\frac{4}{4} = 1305 \pm$ the East measures 1305'± very well. The final distance to the N.W. of Sec.18 measures long as does the final distance to the South 1/4 of Sec.8, and as does the East line of Sec.18. (I'm not convinced that the present E 1/4 of Sec.7 is in the correct location, but there's no moving it, since it has been used in so many surveys.) Also, this corner falls in the centerline of an old North-South town road. This agrees with the 1859 Town Road notes.

W. Jung

C. Pietz

I'm not sure how this survey done by Perry-Carrington Eng. Corp. out of Marshfield, Wi. I don't think Holden's pin was used in that survey.



So one can see that this accepted corner fits the evidence. (I'm not convinced that the present E 1/4 of Sec.7 is in the correct location, but there's no moving it, since it has been used in so many surveys.) Also, this corner falls in the centerline of an old North-South town road. This agrees with the 1859 Town Road notes.

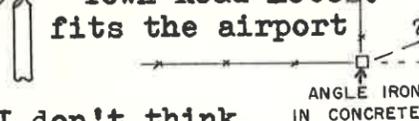

FOUND OLD LOCKING PIN REPLACED IT WITH A HARRISON, DOWN 6"

SIGN PLACED 6-9-92

SET N&C IN POWER POLE ON SW SIDE.

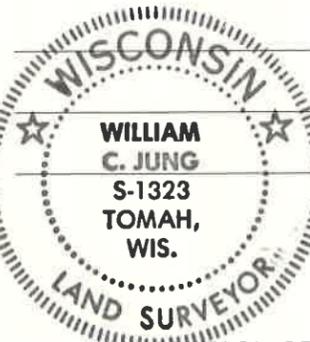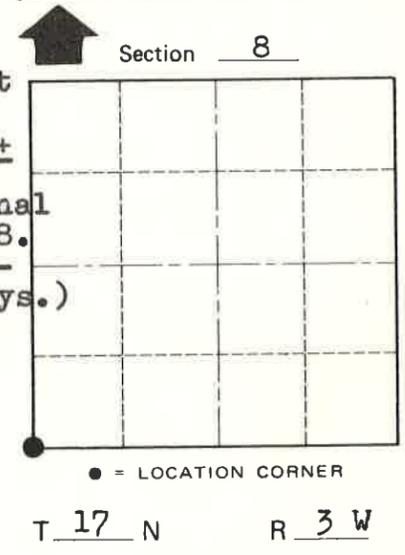

Approved: **HARLEY A. SIME**
MONROE CO. SURVEYOR

See Reverse Side
For Maintenance

William C. Jung

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town Angelo
County of Monroe

COUNTY SURVEYOR FORM NO. 1