

**U.S. PUBLIC LAND CORNER
MAINTENANCE**

49

Corner ID: SE Sec. 8, T17N-R3W
21703080000

| <u>DATE</u> | <u>CREW</u> | <u>MONUMENT INFO</u> |
|---------------|---|---|
| March 3, 2020 | Zachariah P. Dechant Gary L. Dechant | Existing Brass Cap Fort McCoy marker in concrete. Sign 1' east. 33' west of West Sandy Lake Road, Approx. 230' south of CTH A. |

| | <u>Compass Bearing</u> | <u>Distance</u> |
|---|------------------------|-----------------|
| 1) Set 3/4"x24' round iron bar, west bank of road | N52E | 27.04 |
| 2) Set 3/4"x24" round iron bar, west bank of road | S51E | 28.80' |
| 3) Set 3/4"x24" round iron bar, 4' NE of 16" White pine with forked top | S50W | 34.76' |
| 4) Set 3/4"x24" round iron bar, 4' SE of 12" White Pine, double blazed | N50W | 27.96' |



CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013

Nick Hillmer

Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

In April of 1907 Fred Holden set an iron stake here. In 1936 David Blencoe set a Ford drive shaft at this corner. The 1940's McCoy boundary notes show a corner at this location. In April of 1980 William Jung found the McCoy boundary marker and accepted it as the corner.

Description of evidence found

On September 10, 2012, Anderson Engineering of Minnesota located the McCoy monument, a 4 inch U.S. Army Corps of Engineers survey control mark disk set in concrete 0.3 feet below grade and 1.5 feet north of a white wood post.

No. 49 P.2
21703080000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:



Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

MCCOY MONUMENT
Northing (Y) 384372.35
Easting (X) 642321.51

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

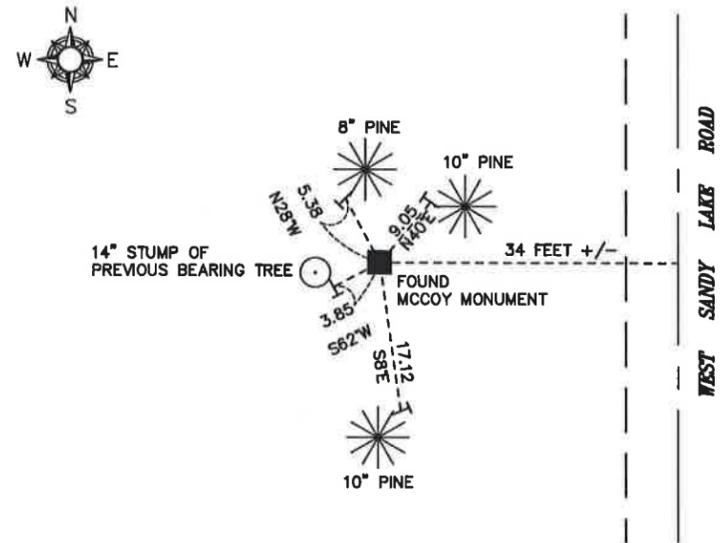

■ - LOCATION CORNER
Corner I.D. SE 8
T 17 N R 3 W
Town of Angelo
Monroe County, WI.

**See Reverse Side
For Maintenance**

I, William C. Jung, do hereby certify that on the 25th day of April, 1980, I found (evidence) (~~no evidence~~) of the Southwest corner of Section 09, T 17 N, R 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 24th day of October 1980.

William C. Jung
 William C. Jung, R.L.S. 1323
 Title

History of corner establishment since Original Government Survey

Fred Holden set an iron stake at this corner in April of 1907. In 1936 David Blencoe set a Ford drive shaft at this corner. Government surveyors set a monument at this corner during the McCoy boundary survey of WWII.

Description of corner evidence found:

I found the McCoy boundary marker.


Approved: **HARLEY A. SIMÉ**
MONROE CO. SURVEYOR

See Reverse Side
 For Maintenance



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

William Jung
Scott Sowers
Todd Tormoen

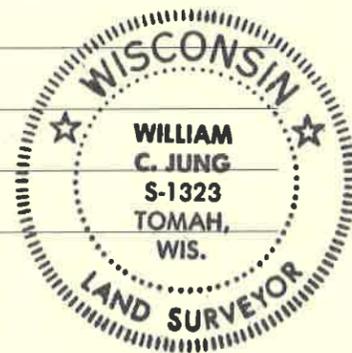

ALL TREES DBL. BLAZED
 WITH NAIL AND CAPS SET

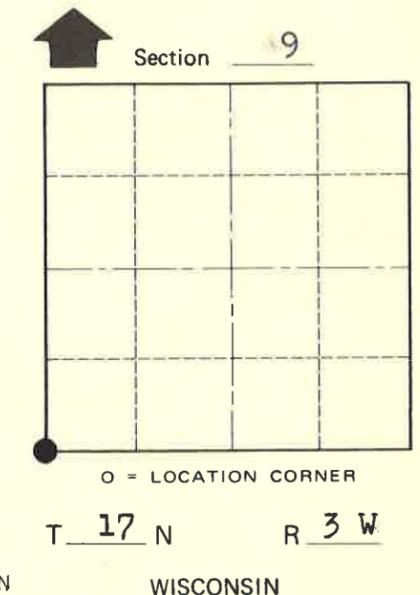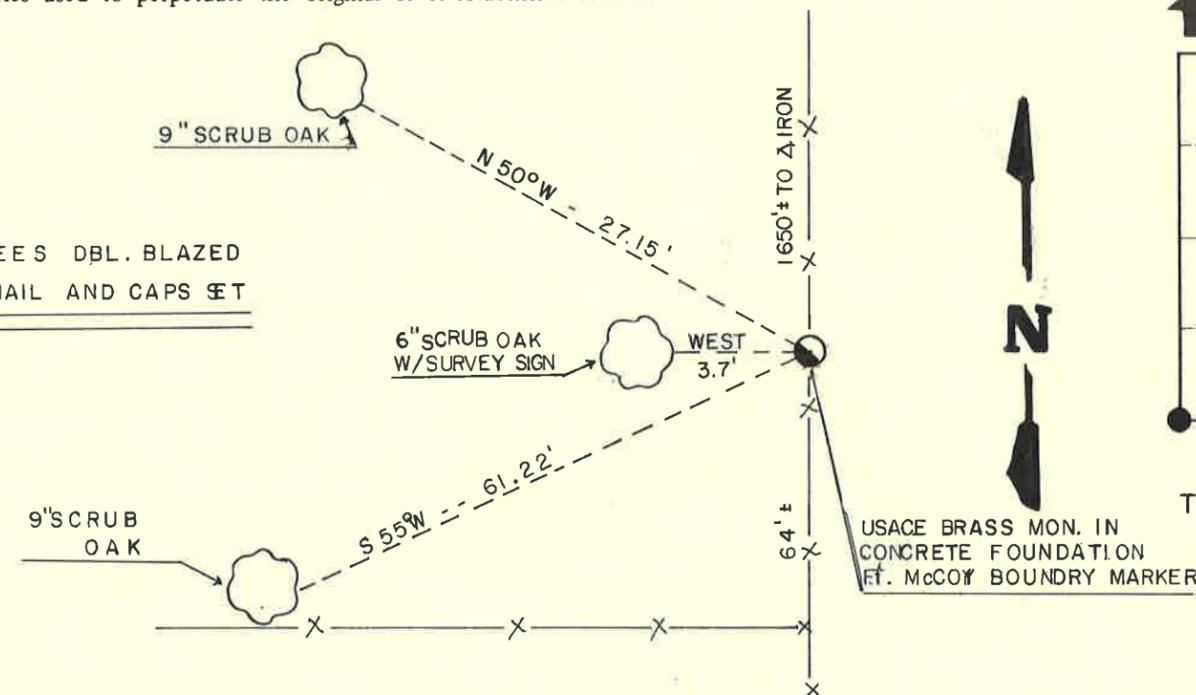

SURVEY CONTROL ORDER

| | |
|------------|-------|
| Horizontal | _____ |
| Vertical | _____ |

WISCONSIN COORDINATE SYSTEM

| Corner | East (X) | North (Y) | Elevation (Z) | Zone |
|-------------------|----------|-----------|---------------|------|
| Control Sta. Name | | | | |

City, Village or Town Angelo
 County of Monroe
Wisconsin

COUNTY SURVEYOR FORM NO. 1