


**U.S. PUBLIC LAND CORNER
MAINTENANCE**

71

**Corner ID: SE Sec. 18, T17N-R3W
21703180000**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT INFO</u>	
February 19, 2020	Zachariah P. Dechant Gary L. Dechant	Existing Harrison intact, down 12", 36' west of Theater Road, 78' south STH "16". Set sign 1/2' east.	
		<u>Bearing</u>	<u>Distance</u>
1)	NW bolt in concrete of BP gas station sign	N68E	87.91'
2)	Set 3/4"x24" round iron bar, 6' SE of twin 12" Cedars	N73W	38.45'
3)	Set 3/4"x24" round iron bar	N46W	43.38'
4)	Set 3/4"x24" round iron bar, west bank of Theater Road	N3E	38.35'

Zachariah P. Dechant

February 25, 2020

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

Fred Holden was at this corner in 1904 and again in 1910. In June of 1976, Harley Sime found an iron pipe used in previous surveys and accepted it as the corner. Sime replaced the pipe with a Harrison monument.

Description of evidence found

On September 12th, 2012, Anderson Engineering of Minnesota located the Harrison monument 1.2 feet below grade.

No. 71
21703180000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:



Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 379146.97
Easting (X) 637084.67

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees, except as noted.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

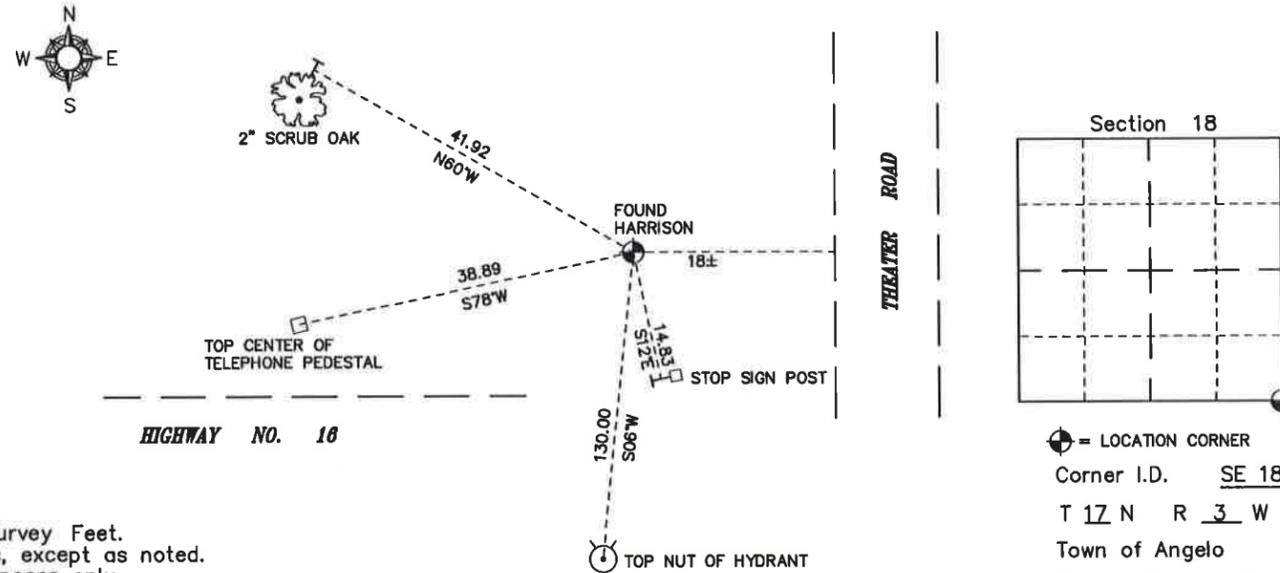

⊕ = LOCATION CORNER
Corner I.D. SE 18
T 17 N R 3 W
Town of Angelo
Monroe County, WI.

**See Reverse Side
For Maintenance**

I, Harley A. Sime, do hereby certify that on the 4th day of June 19 76, I found (evidence) (~~no evidence~~) of the Northwest corner of Section 20, T. 17 N, R. 3 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 7th day of April 19 77.

History of original corner establishment:

Fred A. Holden was at this corner in 1904 and again in 1910.

Description of corner evidence found:

Removed an existing iron pipe that had been used in previous surveys and replaced it with a Harrison marker.

County Surveyor
Title

**Approved: HARLEY A. SIME
MONROE CO. SURVEYOR**



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set Harrison, flush

Witnesses to corner location:

Jung

Dechant

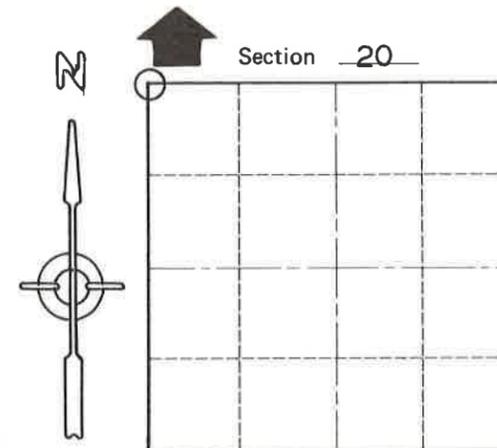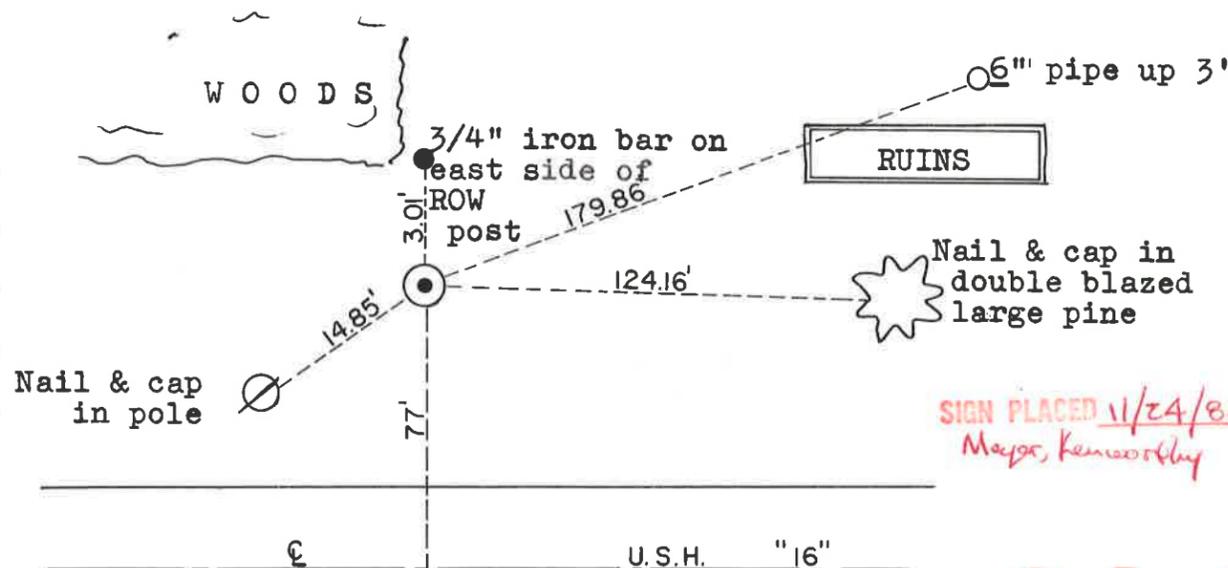

O = LOCATION CORNER
T 17 N R 3 W
WISCONSIN

**See Reverse Side
For Maintenance**

City, Village or Town Angelo
County of Monroe

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				