


**U.S. PUBLIC LAND CORNER
MAINTENANCE**

111

Corner ID: SW Sec. 29, T17N-R3W
21703300000

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT INFO</u>	<u>Compass Bearing</u>	<u>Distance</u>
April 16, 2020	Zachariah P. Dechant Gary L. Dechant	Existing stone at intersection of Iberia Ave & Icarus road, down 20", Holden's rod on east side. Moved railroad spikes on east side of stone. Set 3/4"x18" round iron bar over stone, Mag nails 2' west and south.		
1)	Set 3/4"x24" round iron bar, down 6", 4' SW of r/w fence of bike trail		N56E	62.35'
2)	Set 3/4"x24" round iron bar, down 6", 7' east of bike trail		S76E	51.88'
3)	Set 3/4"x24" round iron bar, down 8" edge of field		S56W	81.01'
4)	Set 3/4"x24" round iron bar, down 6", 2' west of "Denny's Market" sign		N76W	107.82'

Corner and reference markers set on straight lines.

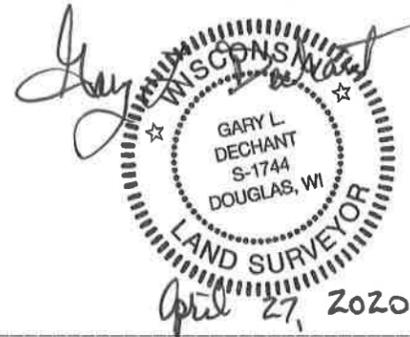

I, William C. Jung, do hereby certify that on the 22nd day of July 1977, I found (evidence) ~~(no evidence)~~ of the S.W. corner of Section 29, T 17 N, R 3 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 30th day of January 1978.

W.C.Jung, R.L.S.1323

Crew Chief, County Surveyor's
Title Office

History of original corner establishment:

Fred Holden in his notes of April, 1902, shows an iron rod at this corner, and an iron rod and stone here in his notes of January, 1905.

Description of corner evidence found:

Found a stone with a bent iron rod beside it, down 19". It lies pretty much in the road intersection and is southwest of the bike trail. Buried 4 cans with R.R. spikes in them on top of the stone.

Corner update: 5/22/81 Crew: Meyer, Dechant, and Pietz
The stone was found again. Additional ties were taken.




Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Found a stone in the road.

Witnesses to corner location:

W. Jung
G. Dechant
B. Rasmussen

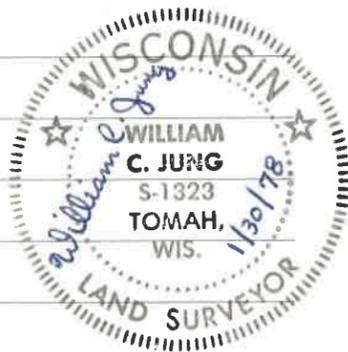

See Reverse Side For Maintenance

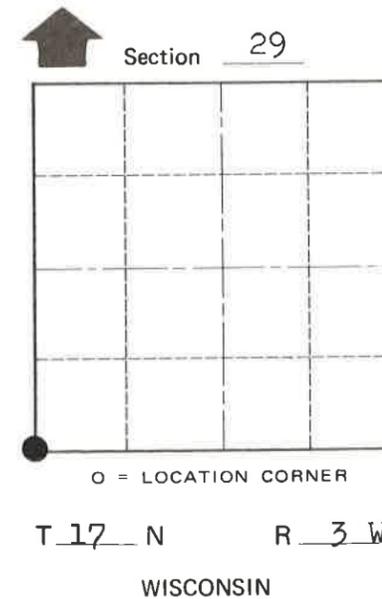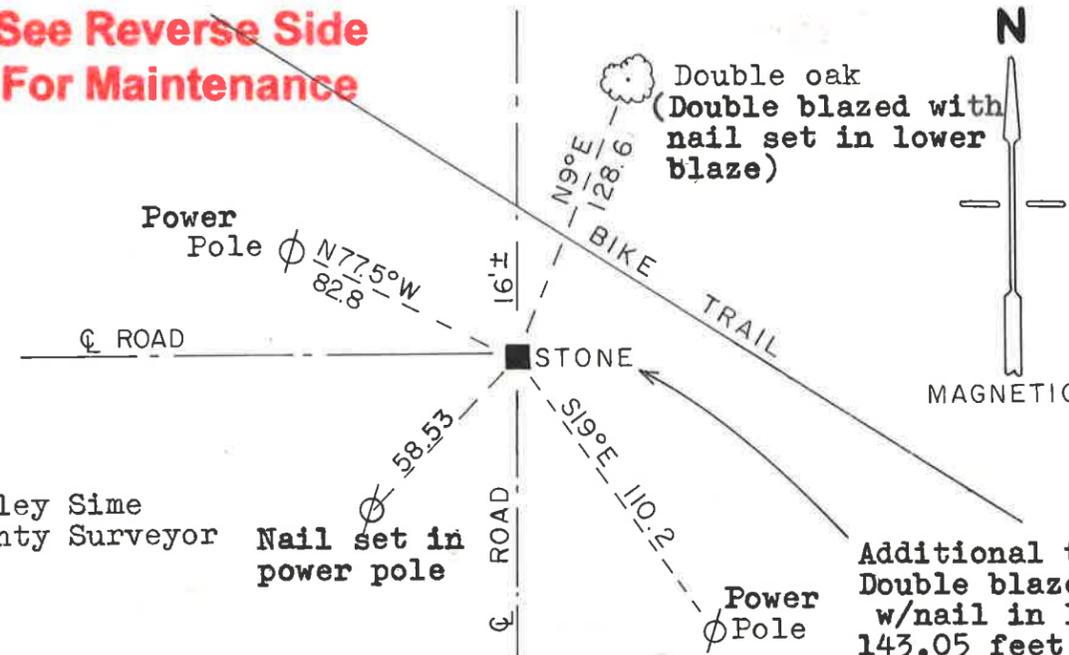

Approved: Harley Sime
County Surveyor

Nail set in power pole

Additional tie:
Double blazed 10" white pine w/nail in lower blaze located 143.05 feet Southeast of corner

City, Village or Town Angelo

County of Monroe

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

COUNTY SURVEYOR FORM NO. 1