U.S. PUBLIC LAND CORNER MAINTENANCE

 # 112

Corner ID: S1/4 Sec.30, T17N-R1W

21701300020

DATE	CREW	MONUMENT INFO
May 15, 2020	Zachariah P. Dechant Gary L. Dechant	Existing Harrison intact, at fence corner new sign 1' west

		Compass Bearing	Distance
1)	Existing 3/4" round iron bar in pasture (1990 tie)	N46E	46.72'(46.72')
2)	Set 3/4"x24" round iron bar, down 10" in field	S50E	24.11'
3)	Set 3/4"x24" round iron bar, down 10" in field	S29W	22.28'
4)	Set 3/4"x24" round iron bar, down 10" in field	NW	9.54'

Gary L. Dechant

WISCONSIN GARY L. DECHANT S-1744 DOUGLAS, WI LAND SURVEYOR

May 19, 2020

COUNTY SURVEYOR FORM NO. 1

CERTIFICATE

I, Garold A. Sime, do hereby certify that on the 13th day of July 19 90, I found (evidence) (~~XXXXXXXXX~~) of the S¼ corner of Section 30, T 17 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 19th day of October 1990.

Garold A. Sime

Monroe County Surveyor
Title

CERTIFIED LAND CORNER

No. 112

History of corner establishment since Original Government Survey

Hamilton LaRue was at this corner in Aug. of 1897. Webster Kenyon was at this corner in January of 1895 and Fred Holden shows a distance to this corner in his survey dated Nov. 6th, 1905.

Description of corner evidence found:

I accepted the existing fence corner as the best available evidence.

See Reverse Side For Maintenance

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set cast iron Harrison Monument at corner

Witnesses to corner location:

Garold A. Sime, R.L.S.

John F. Kenworthy

Brian Forsythe

WISCONSIN GAROLD A. SIME S-1261 TOMAH, WIS. LAND SURVEYOR

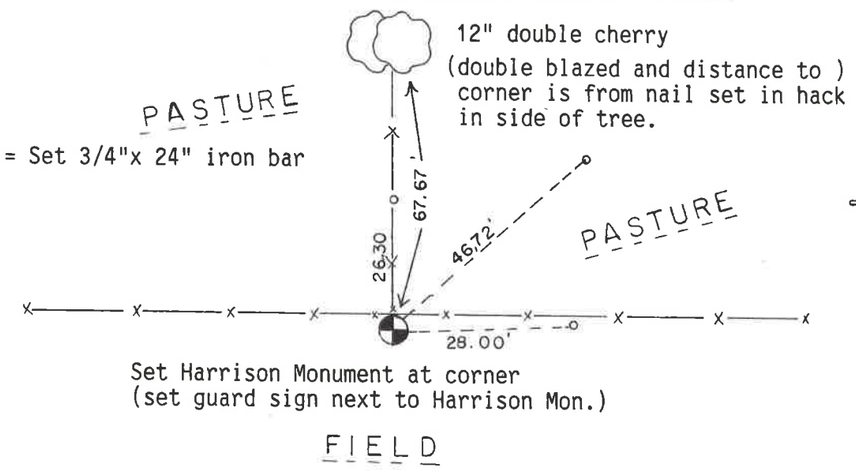

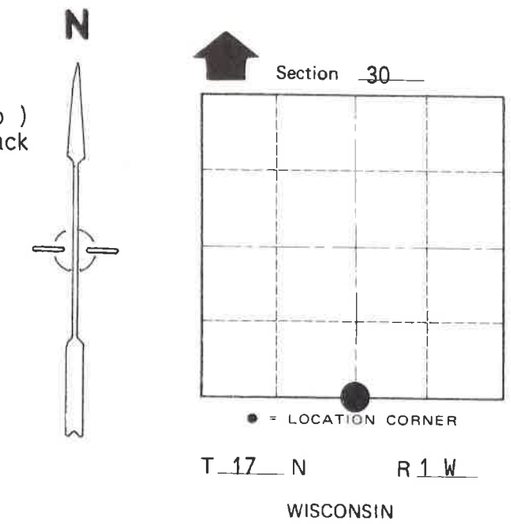

SURVEY CONTROL ORDER

Horizontal	
Vertical	

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Tomah

County of Monroe