


**U.S. PUBLIC LAND CORNER
MAINTENANCE**

125

**Corner ID: SW Sec. 35, T17N-R1E
41701340000**

<u>DATE</u>	<u>CREW</u>	<u>MONUMENT INFO</u>
April 29, 2020	Zachariah P. Dechant Gary L. Dechant	Existing Harrison intact, placed concrete and stones around Harrison, in remnants of north-south fencing. New north-south fence 5' east. Set new sign 3' north

	<u>Compass Bearing</u>	<u>Distance</u>
1) Set 1/4" iron pipe 5' east of new north-south fence	N22E	18.64'
2) Existing chiseled cross in bottom shelf of a 3 shelf stone ledge	N82E	17.35 (17.35)'
3) Set 3/4"x24" pinched iron pipe, 4' NE of 18" White Oak	S64W	24.20'
4) Set 1/4" iron pipe, 4' SE of 6" Maple	N61W	32.91'

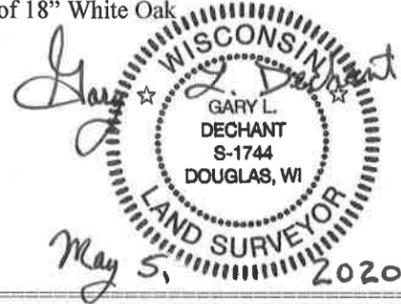

I, Gary L. Dechant, do hereby certify that on the 26th day of November 1993, I found (evidence) ~~(no evidence)~~ of the SW corner of Section 35, T 17 N, R 1 E Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 14th day of Dec. 1993.

Gary L. Dechant
Reg. Land Surveyor, 1744
Title

History of corner establishment since Original Government Survey

No known history since the original government survey.

Description of corner evidence found:

Accepted remains of fence corner as best available evidence, fits mile distance to the east extremely well.

**See Reverse Side
For Maintenance**




Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Set Harrison Monument in mound, set survey sign 1' north.

Witnesses to corner location:

David E. Madison
Gary L. Dechant

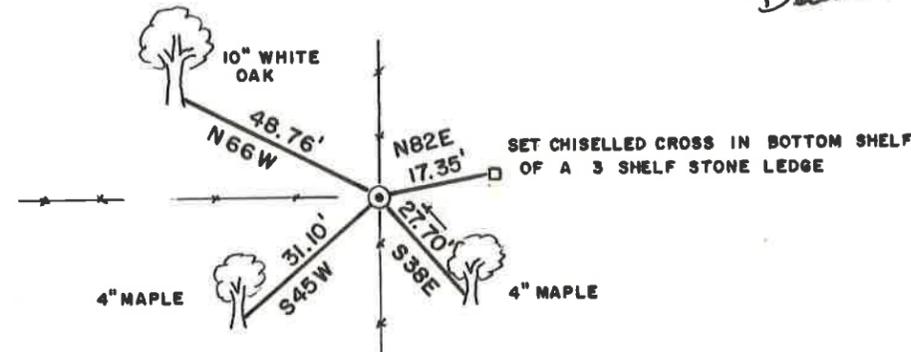

(Trees double blazed with 20d nails set)

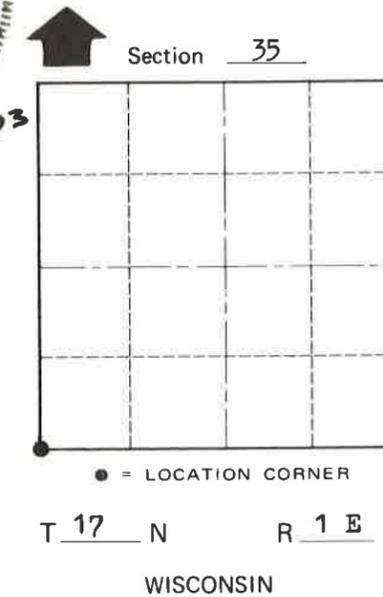

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town Oakdale
County of Monroe

COUNTY SURVEYOR FORM NO. 1