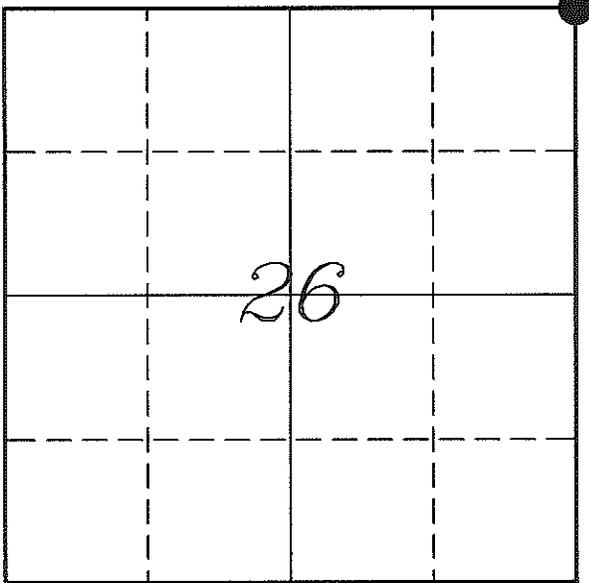


21502230000

U. S. PUBLIC LAND SURVEY MONUMENT RECORD

**SECTION 26, T15N, R2W, TOWN OF SHELDON
MONROE COUNTY, WISCONSIN**

LOCATION OF LANDMARK

Witnesses: Laurence E Johns III
Larry Handschy

Date: 7 February 2013

MONROE COUNTY COORDINATE SYSTEM	
Northing	310467.461
Easting	689388.438
Datum	NAD 1983 (1991)
Elevation	
Datum	
TYPE OF LANDMARK:	
Set Harrison Monument	
BEARINGS ARE REFERENCED TO:	
Monroe County Coordinates	

Describe any record evidence, monument evidence, testimonial evidence or any other material evidence you considered and whether the monument was found or restored through acceptance of an obliterated evidence location.

No bearing trees of record were located.

The only occupation at this corner is a partial down fence running North & South.

There is a fence running from the N 1/4 Corner toward this corner but stops at Orbit Avenue just West of the '40' Corner.

I determined this corner by extending the above mentioned fence line til it intersected the down fence. This location appears to fit well with distances in all 4 directions.

I accepted this location as the best available evidence of the original government corner and place a Harrison Monument.

Describe or show any material discrepancy between the location of the restored corner and that of the corner previously restored or re-established.


Noah Phelps established this corner in August 1847.

Hamilton La Rue was at this corner, in 1900, during a survey in Section 24. He states he found a known corner.

Fred Holden was at this corner, in April 1911, during a survey in Section 23. He shows he found the government corner.


RECORD OF DURABLE WITNESS MONUMENTS

NO	DESCRIPTION	BEARING	DISTANCE
1	Set 3/4" x 18" Iron Rod 2' West of 12" Oak	N 14°57'42" E	42.44'
2	Set 3/4" x 18" Iron Rod 2' West of 16" Poplar	S 77°14'26" E	39.47'
3	Set 3/4" x 18" Iron Rod 2' West of 18" Oak	S 09°43'24" E	25.92'
4	Set 3/4" x 18" Iron Rod 2' East of 15" Poplar	N 82°26'10" W	34.61'

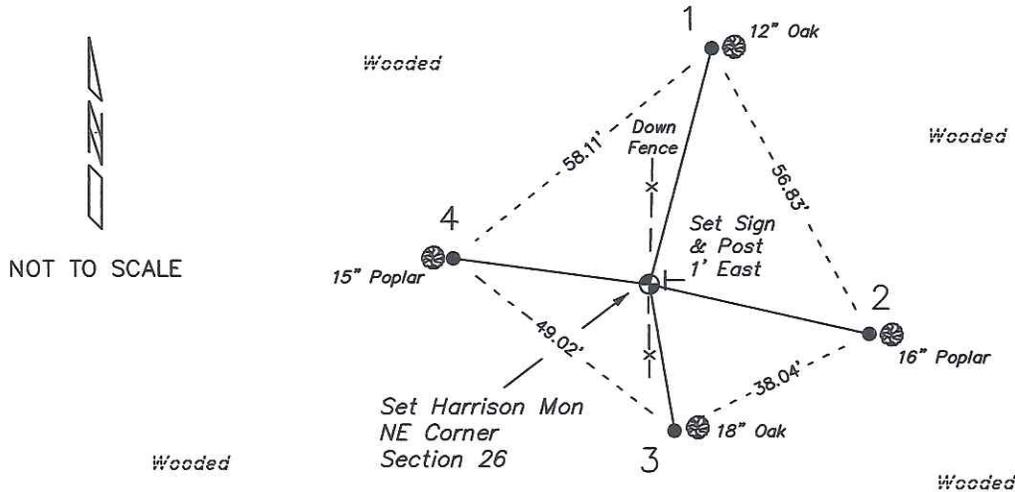

PLAN VIEW DRAWING OF REFERENCE TIES

Map Showing Distance And Direction To Other Public Land Survey Corners Used For Re-Establishing The Corner

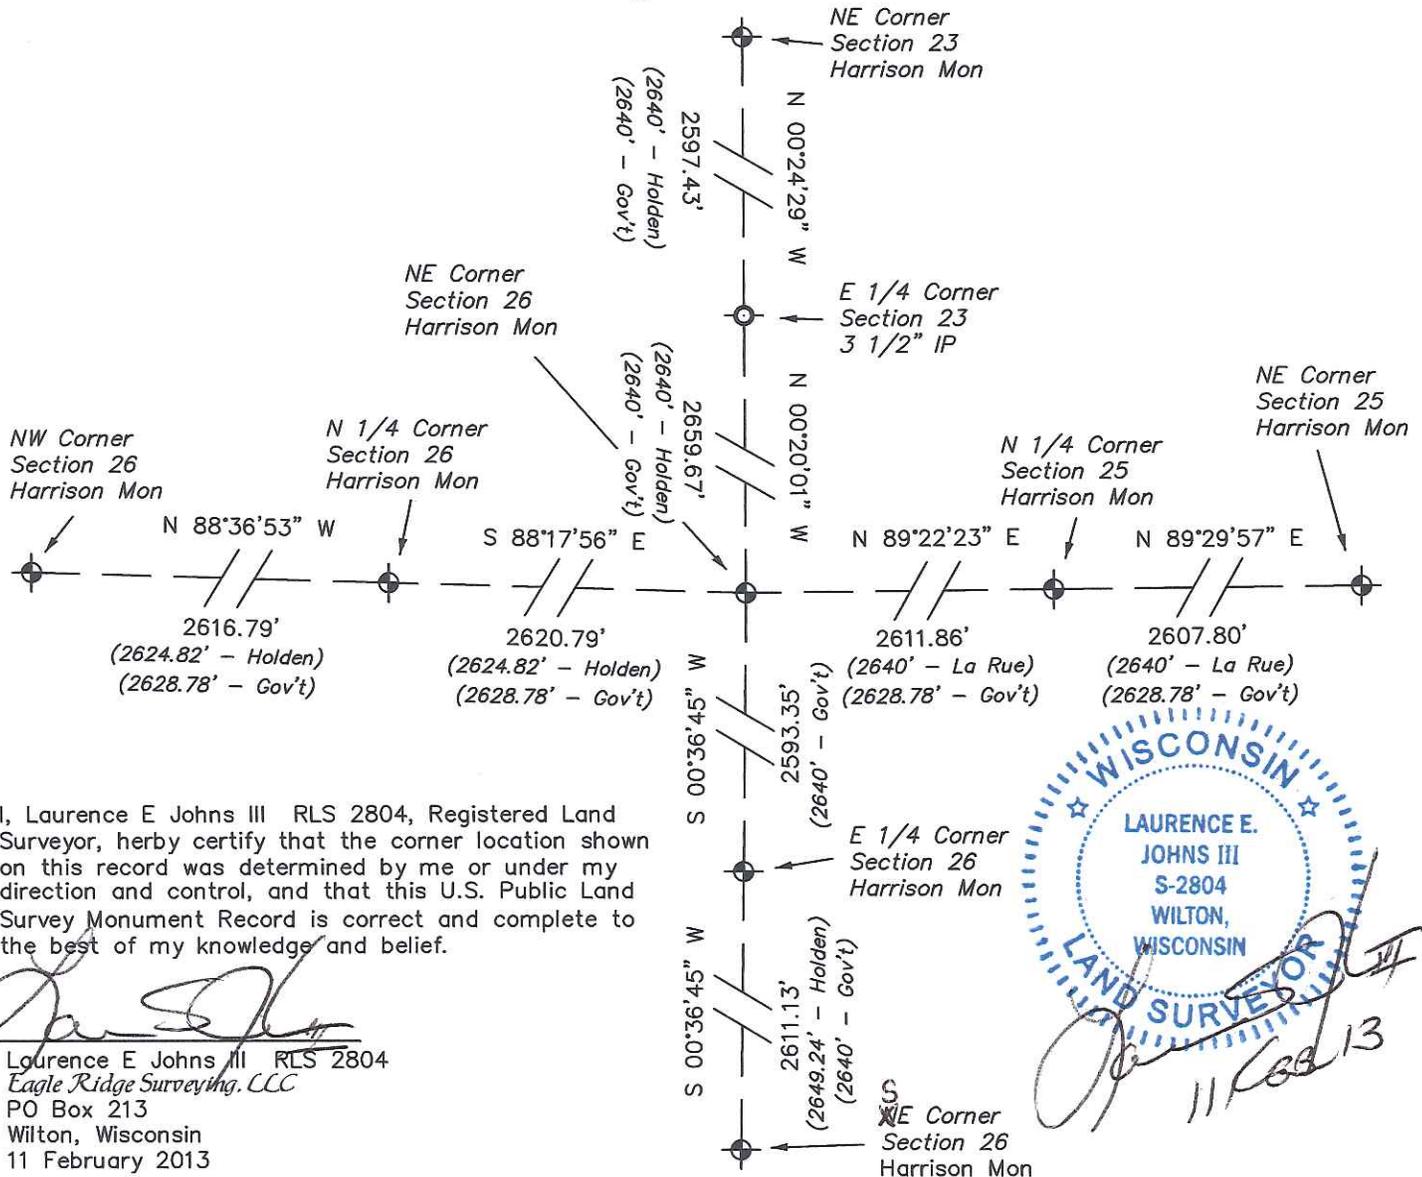


I, Laurence E Johns III RLS 2804, Registered Land Surveyor, hereby certify that the corner location shown on this record was determined by me or under my direction and control, and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Laurence E Johns III RLS 2804
Eagle Ridge Surveying, LLC
PO Box 213
Wilton, Wisconsin
11 February 2013

21502230000


U. S. PUBLIC LAND SURVEY MONUMENT RECORD
'Addendum for Corner Photographs'

SECTION 26, T15N, R2W, TOWN OF SHELDON
MONROE COUNTY, WISCONSIN

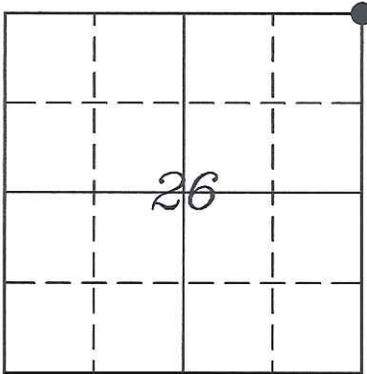

LOCATION OF LANDMARK

Date:
7 February 2013

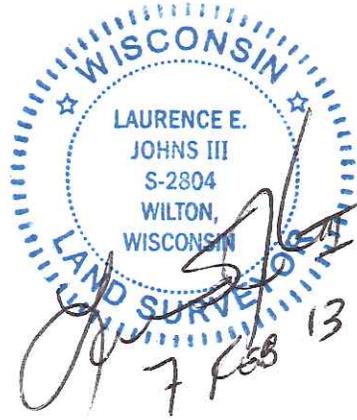

Taken from the West, near Tie #4



Taken from the West, near Tie #4