

2170136000

I, Lawrence A. Feddersen, do hereby certify that on the 28 day of June 1982, I found ~~(evidence)~~ (no evidence) of the SE corner of Section 36, T17 N, R 1W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 28 day of June 1982.

Lawrence A. Feddersen

Registered Land Surveyor
Title

History of corner establishment since Original Government Survey

No known history of corner establishment since Original Government Survey.

Description of corner evidence found:




Set by projecting line South from E $\frac{1}{2}$ Section 25 to E $\frac{1}{2}$ Section 36, T17N - R1W and at proportionate distances between the E $\frac{1}{2}$ Section 25, T17N - R1W and the E $\frac{1}{2}$ Section 1, T16N - R1W. This fits conditions very well. The distance from this corner (SE 36) to the S $\frac{1}{2}$ Section 31, T17N - R1E fits the original government notes within 3'+ and also by further subdivision of the East line of Section 36 the NE corner of the SE $\frac{1}{4}$ SE $\frac{1}{4}$ of Section 36 falls 2'+ South of a down East-West fence line. It also fits half mile distance to the west reasonably well.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Gary Dechant (D)

Thomas Mangene

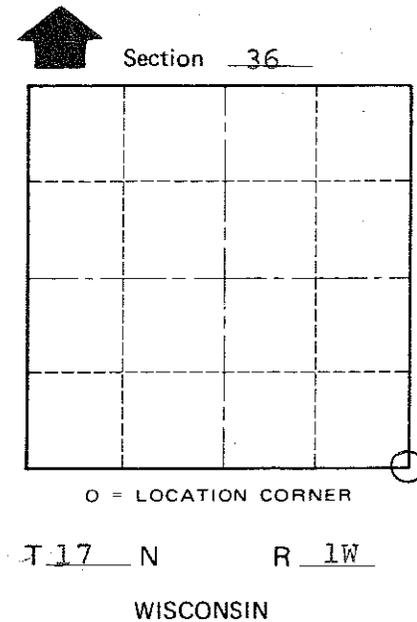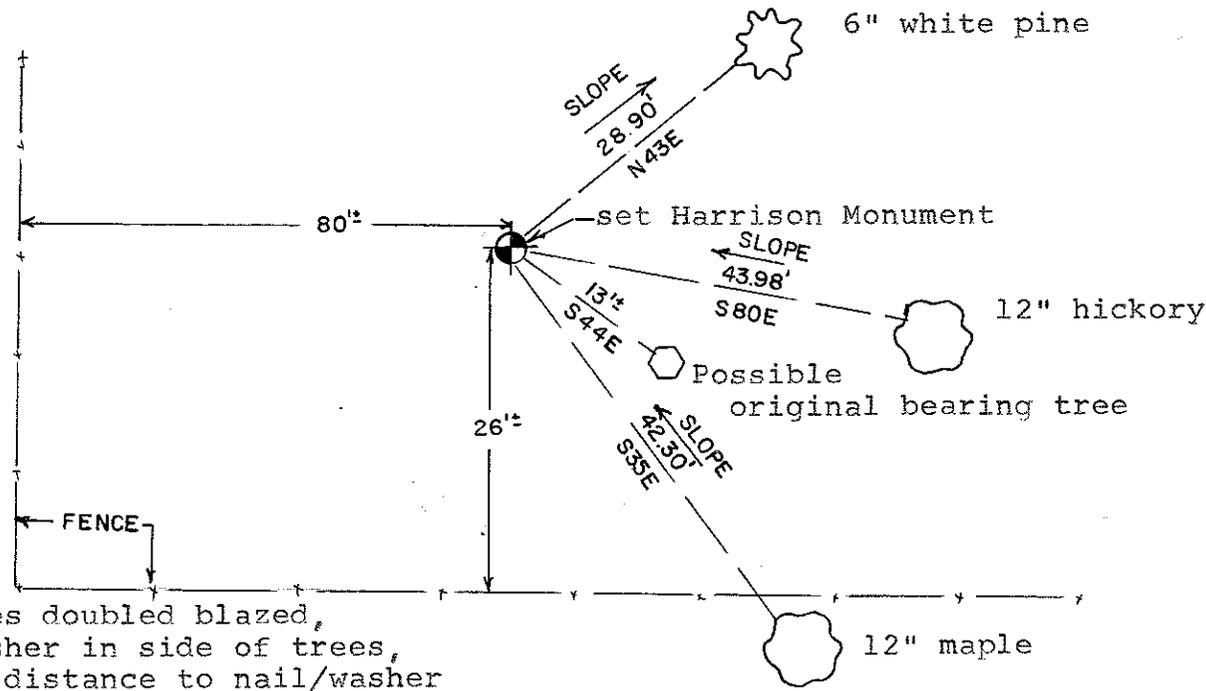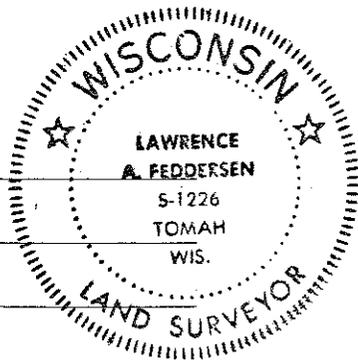

All trees doubled blazed, nail/washer in side of trees, scribed, distance to nail/washer

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City/Village of Town of Tomah

County of Monroe