

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

The town road records of May 1885 call for this corner to be at the road intersection. The 1935 Highway map shows that the new Highway "16" would shift south of the old road. Harley Sime set a Harrison monument at the corner by single proportionate measurement that fits road to the south reasonably well.

Description of evidence found

On February 6th, 2013, Anderson Engineering of Minnesota located the Harrison monument 0.2 feet below grade. The monument is 43 feet north of the centerline of Highway 16.

No. 21703140020



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 379029.90
Easting (X) 655655.63

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

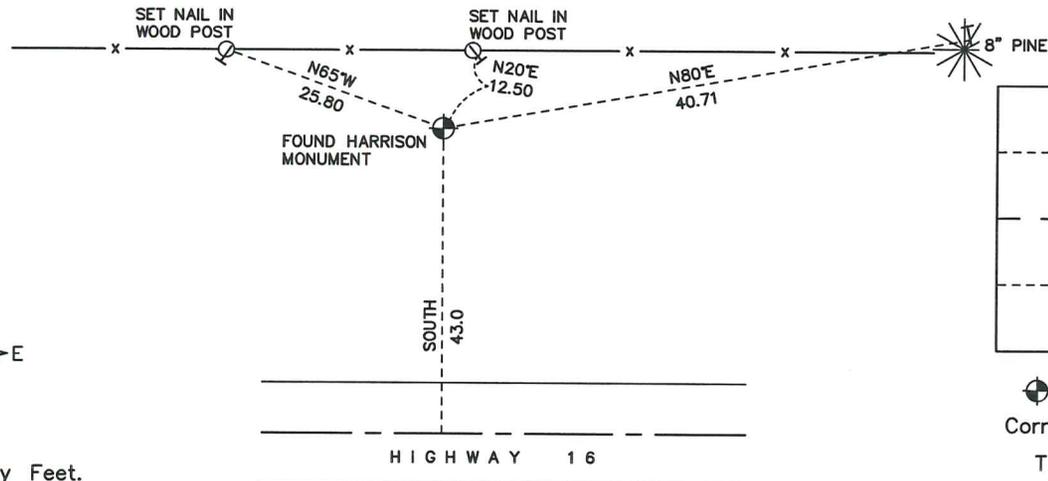

⊕ = LOCATION CORNER
Corner I.D. S 1/4 14
T 17 N R 3 W
Town of Angelo
Monroe County, WI.

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

21703140020

I, Harley A. Sime, do hereby certify that on the 28th day of April 19 81, I found ~~(evidence)~~ (no evidence) of the N¹/₄ corner of Section 23, T. 17 N, R. 3 W. Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 2nd day of July 19 81.

Harley A. Sime, R.L.S. 355

County Surveyor
Title

History of corner establishment since Original Government Survey

A Surveyor was here in April of 1895. (Schroeder or Kenyon?)
The Town Road Records of May, 1885, call for this corner to be at the road intersection.

Description of corner evidence found:

Set by single proportionate measurement. Fits Road to the South reasonably well. The 1935 highway map shows that the new Highway "16" would shift South of the old road. This agrees with our findings and present conditions.



COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

G. Dechant

C. Pietz

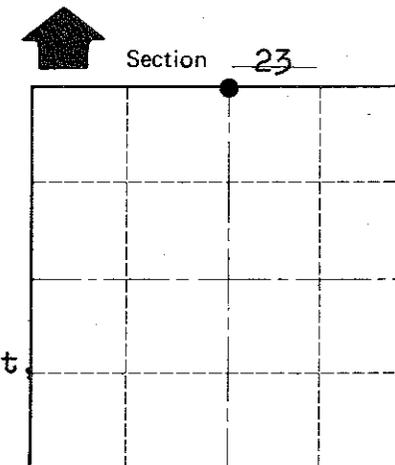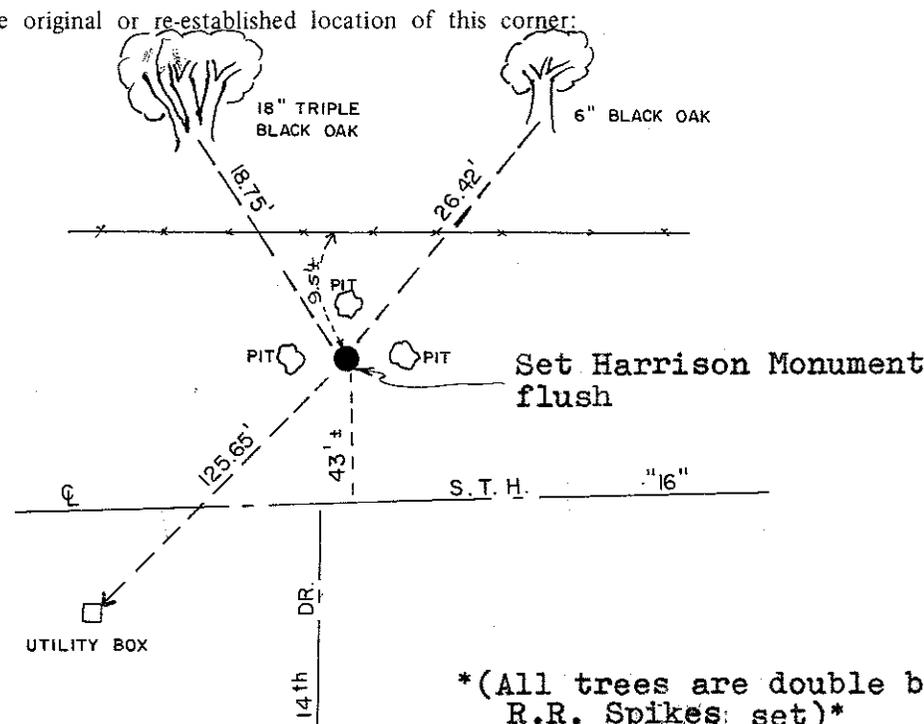

● = LOCATION CORNER

T 17 N R 3 W
WISCONSIN

Approved: HARLEY A. SIME
MONROE CO. SURVEYOR

SURVEY CONTROL ORDER

Horizontal _____
Vertical _____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

(All trees are double blazed with R.R. Spikes set)

~~City, Village or Town~~ Angelo

County of Monroe