

57

**U.S. PUBLIC LAND CORNER
MAINTENANCE**

**Corner ID : E1/4 Sec. 16, T18N-R2W
21802162000**

DATE	CREW	MONUMENT TYPE -----
November 4, 2016	Zachariah P.Dechant Gary L. Dechant	Existing Harrison intact on steep west road bank. Made a flat spot on slope around Harrison. 24' west of center line CTH "E"

References:

	<u>Bearing</u>	<u>Distance</u>
1) Set 3/4"x24" round iron bar, down 6", 16' east center line CTH "E"	N46E	54.79'
2) Set 3/4"x24" round iron bar, down 12" in field	N46E	81.26
3) Existing 3/4" round iron bar, down 6", 16' east center line CTH "E"	East	40.70' (40.81')
4) Set 3/4"x24" round iron bar, down 12" in field	East	63.67'


Harrison and reference markers set on straight lines.



CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013


Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

O.R. Dahl was near this location in November of 1868. In October of 1990 Bryan Meyer set a Harrison monument on line between the northeast and southeast corners of Section 16 and by doubling north the distance from the southeast corner of Section 16 to the centerline of a town road (Bittersweet Lane). Town Road records from 1871 indicate that Bittersweet Lane is to run along the north line of the SE 1/4-SE 1/4 of Section 16.

Description of evidence found

On January 24th, 2013, Anderson Engineering of Minnesota located the Harrison monument 0.1 feet below grade. The monument is 25+/- feet west of the centerline of the road on a side slope.

No. 57
21802162000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer
Josh Oslund
Dan Greenwald





MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 413364.99
Easting (X) 678644.81

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

All distances are shown in U.S. Survey Feet.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

**See Reverse Side
For Maintenance**

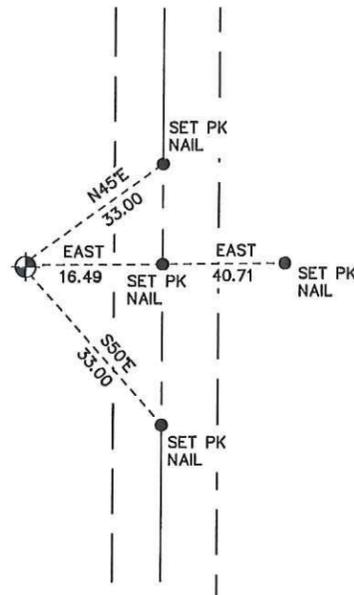

⊙ = LOCATION CORNER
Corner I.D. E 1/4 16
T 18 N R 2 W
Town of Greenfield
Monroe County, WI.

I, Bryan H. Meyer, do hereby certify that on the 11th day of October 19 90, I found ~~evidence~~ (no evidence) of the West 1/4 corner of Section 15, T 18 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 26th day of Dec. 19 90.

Bryan H. Meyer
Deputy County Surveyor
Title

History of corner establishment since Original Government Survey

O. R. Dahl was at or near this corner in November of 1868.

See Reverse Side For Maintenance

Description of corner evidence found:

I set this corner on line between the Northwest and Southwest corners of Section 15 and by doubling North the distance from the Southwest corner of Section 15 to the centerline of a town road (Bittersweet Lane). Town Road records from 1871 indicate that Bittersweet Lane is to run along the North line of the SE $\frac{1}{4}$ -SE $\frac{1}{4}$ of Section 16. I also checked the distance to the occupied fence corner a forty to the East from the Harrison and measured 1317'±.



H. A. Sime and Associates
P. O. Box 705
Tomah, Wisconsin 54660
Phone: (608)-372-5392




COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Kenworthy
Date: October 11, 1990
Weather: Clear, Snow cover, 40°±
Witnesses to corner location:

Bryan H. Meyer

John Kenworthy

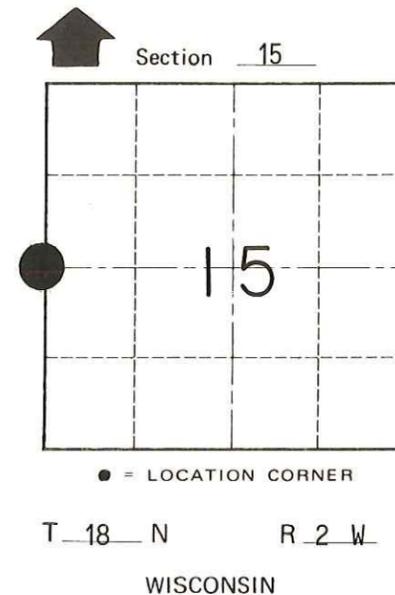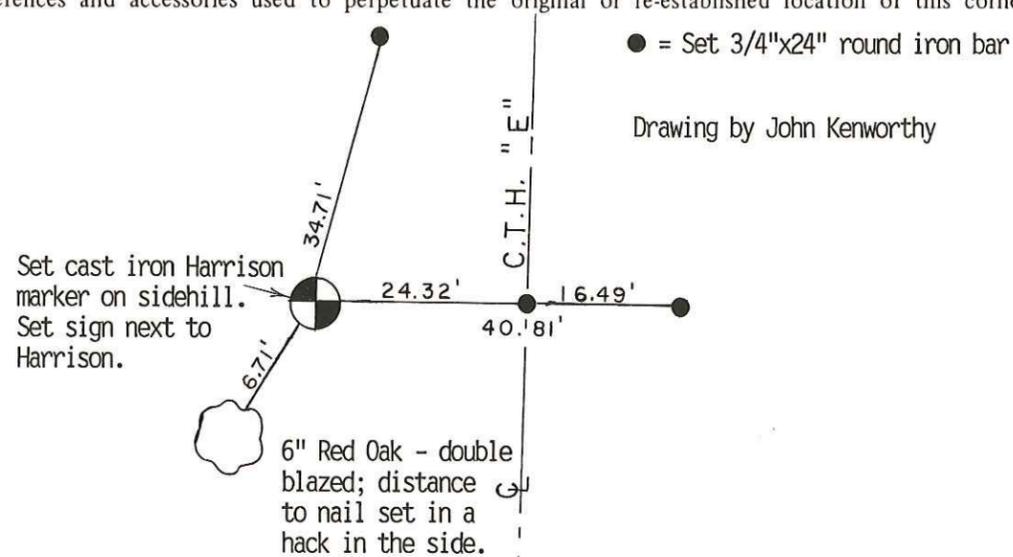

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City, Village or~~ Town of Greenfield
County of Monroe