

CERTIFICATE

CERTIFIED LAND CORNER

No. 93

21802240000

I, Harley Sime, do hereby certify that on the \_\_\_\_\_ day of \_\_\_\_\_ 19 74, I found ~~(evidence)~~ (no evidence) of the NW corner of Section 30, T 18 N, R 1 W, Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

History of original corner establishment:

In January of 1901, Fred Holden (County Surveyor) resurveyed Section 30 and the records state that he set a stone with a cross at the NW corner of said Section. This area was excavated and the stone was not found, however, in the location of the SW corner a stone not in his records was found. This may indicate

Description of corner evidence found: indicate a possible mile error North and South on the West line of this section(monument-wise only)

Dated this 13 day of March 19 75

Harley P. Sime  
COUNTY SURVEYOR  
Title

This corner was set by prolonging the line between the NE and N¼ corners and intersecting this line with existing field evidence. The resulting measurements to and from this corner fit original notes pretty well.



COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set a standard Harrison monument up 2", with accessories shown below:

Witnesses to corner location:

- SURVEY CREW
- K. Pritzlaff - Survey Crew Chief
- D. Malliet
- B. Jung
- A. Lueck

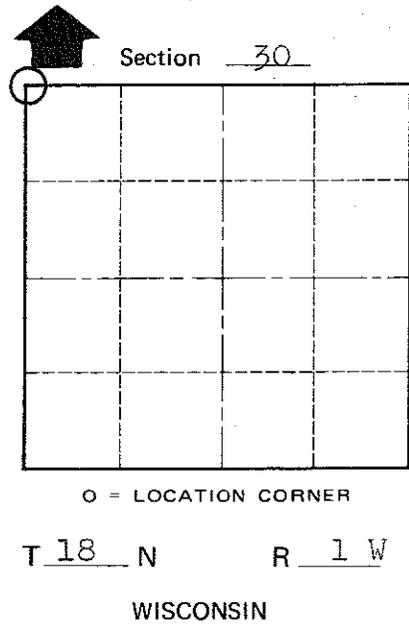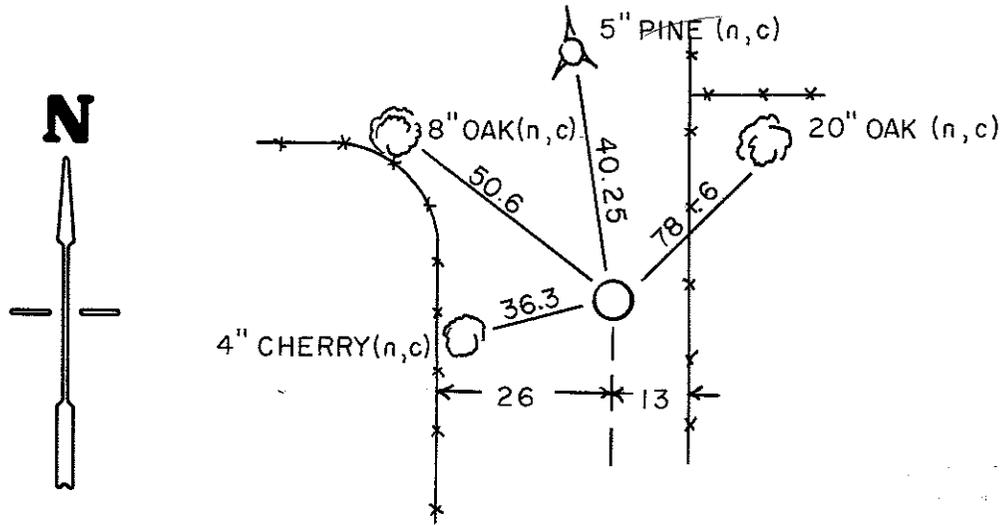

COUNTY SURVEYOR'S  
OFFICE  
MAY 6-09-87

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange  
County of Monroe