


**CERTIFICATE**

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 23rd day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909  
Anderson Engineering of Minnesota, LLC.

**CERTIFIED LAND CORNER**

History of corner established since Original Government Survey

The 1940's McCoy boundary notes show a corner at this location.

**Description of evidence found**

The corners location is in the north flowage and is currently under 13 feet of water. The corner is computed by single proportion method between the east quarter corner of Section 1 and the east quarter corner of Section 12 and utilizing the historic angle shown on the 1940's McCoy boundary notes.

No. 21903010000



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Witnesses to corner location:

Nick Hillmer  
Josh Oslund  
Dan Greenwald



MONROE COUNTY  
COORDINATE SYSTEM  
NAD 1983 (2007)

COMPUTED LOCATION

Northing (Y) 452508.75  
Easting (X) 662902.33

Base Station - 22 182W

Northing (Y) 408053.25  
Easting (X) 679287.00

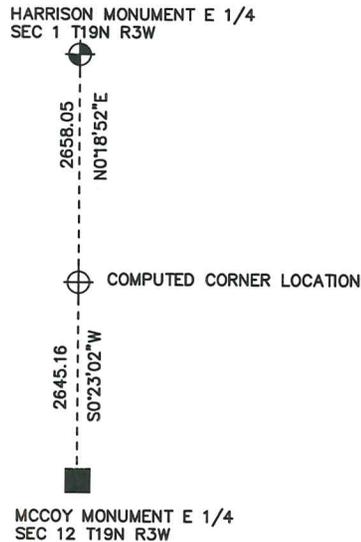

⊕ = LOCATION CORNER  
Corner I.D. SE 1  
T 19 N R 3 W  
Town of New Lyme  
Monroe County, WI.

All distances are shown in U.S. Survey Feet.  
Bearings are for tie reference purposes only.  
Coordinates were derived from RTK GNSS procedures.