


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

SECTION 34, T15N, R2W  
 MONROE/VERNON COUNTY, WISCONSIN

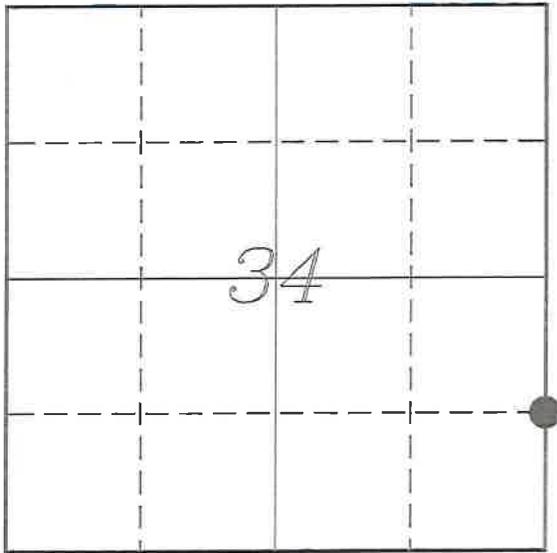

MONROE COUNTY COORDINATE SYSTEM	
Northing	301093.399
Easting	684081.508
VERNON COUNTY COORDINATE SYSTEM	
Northing	212326.069
Easting	780530.533
Datum	NAD 1983 (2011)
TYPE OF LANDMARK:	
Set Lunde Monument 4" Brass Capped Iron Pipe	
BEARINGS ARE REFERENCED TO: Vernon County Coordinates (Survey Grade)	

LOCATION OF LANDMARK

Witnesses: Laurence E Johns III  
 Doug Avoles

Adjust Bearings +00°05'50"  
 To Convert to Monroe County

Date: 12 June 2019

Describe or show any material discrepancy between the location of the restored corner and that of the corner previously restored or re-established.

F Curtis Crook was at this corner, in July 1993, during a survey in Section 34. He shows that he set a 3/4" iron rod.

Describe any record evidence, monument evidence, testimonial evidence or any other material evidence you considered and whether the monument was found or restored through acceptance of an obliterated evidence location.

This corner was made part of the County Line between Monroe & Vernon County on June 26, 1939. It was not surveyed at that time.


I found the iron rod set by Crook. It was located in the backyard of a residence on Pine Street in the Village of Ontario.

It is located 0.16' North and 0.24' West of the mid-point between section corners.

I accepted the iron rod as the corner shown on Crook's survey and replaced it with a Lunde Monument. The monument was set to about 12" below surface. No sign was placed because the corner is located in the backyard of a residence.

## RECORD OF DURABLE WITNESS MONUMENTS

NO	DESCRIPTION	BEARING	DISTANCE
1	Set 3/4" x 18" Iron Rod 1' North of a Telephone Pedestal	N 82° 44' 12" E	144.74'
2	Set 3/4" x 18" Iron Rod 1' North of Power Pole 15-2W-35.3	S 55° 18' 01" E	148.71'
3	Set 3/4" x 18" Iron Rod At NE Corner of Concrete Pad	S 42° 43' 13" E	61.51'
4	Set 3/4" x 18" Iron Rod East Side of 3-way Fence Post	S 82° 13' 44" W	19.50'

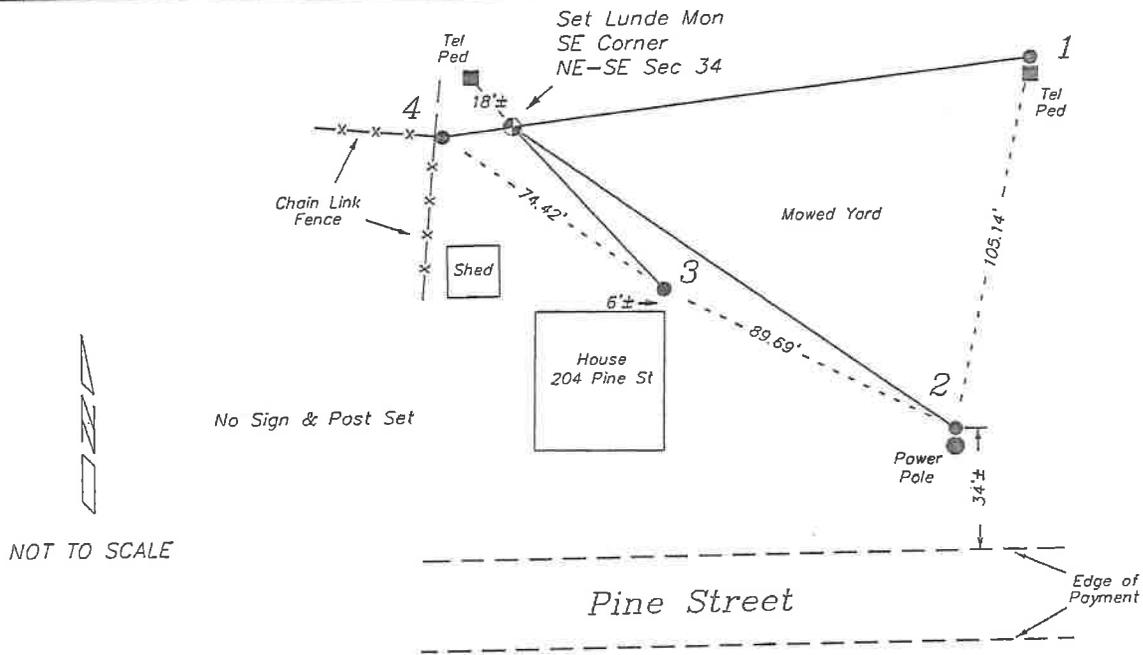

## PLAN VIEW DRAWING OF REFERENCE TIES

Map Showing Distance And Direction To Other Public Land Survey  
Corners Used For Re-Establishing The Corner

