


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

SECTION 34, T15N, R2W  
 MONROE/VERNON COUNTY, WISCONSIN

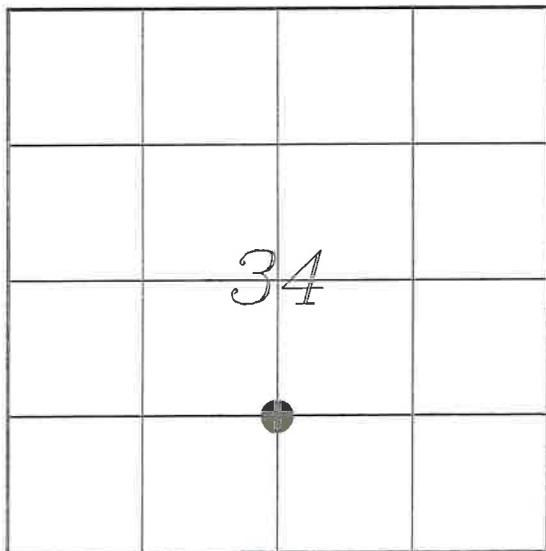

LOCATION OF LANDMARK

MONROE COUNTY COORDINATE SYSTEM	
Northing	301423.950
Easting	681458.290
VERNON COUNTY COORDINATE SYSTEM	
Northing	212352.160
Easting	777907.293
Datum	NAD 1983 (2011)
TYPE OF LANDMARK: Set Lunde Monument 4" Brass Capped Iron Pipe	
BEARINGS ARE REFERENCED TO: Vernon County Coordinates (Survey Grade)	

Witnesses: Laurence E Johns III  
 Doug Avoles

Adjust Bearings +00°05'49"  
 To Convert to Monroe County

Date: 12 June 2019

Describe or show any material discrepancy between the location of the restored corner and that of the corner previously restored or re-established.

Gary Dechant shows this corner on a survey conducted in December 1994. He does not show a monument at this corner nor does he show how he determined its location.

Laurence Johns was at this corner, in June 2016 and again in September 2017, during surveys in Section 34. He shows that he set a 3/4" iron rod.

Describe any record evidence, monument evidence, testimonial evidence or any other material evidence you considered and whether the monument was found or restored through acceptance of an obliterated evidence location.


This corner was made part of the County Line between Monroe & Vernon County on June 26, 1939. It was not surveyed at that time.

Found the 3/4" iron rod set by Johns. This monument fits the breakdown of the section for this corner.

I accepted the iron rod as the corner and replaced it with a Lunde Monument.


## RECORD OF DURABLE WITNESS MONUMENTS

NO	DESCRIPTION	BEARING	DISTANCE
1	Set 3/4" x 18" Iron Rod 3' West of a 15" Birch	S 88°43'27" E	41.89'
2	Set 3/4" x 18" Iron Rod In Fence Line	S 27°11'15" W	78.04'
3	Set 3/4" x 18" Iron Rod In Fence Line	S 73°39'13" W	39.08'
4	Set 3/4" x 18" Iron Rod In Fence Line	N 60°20'00" W	43.77'

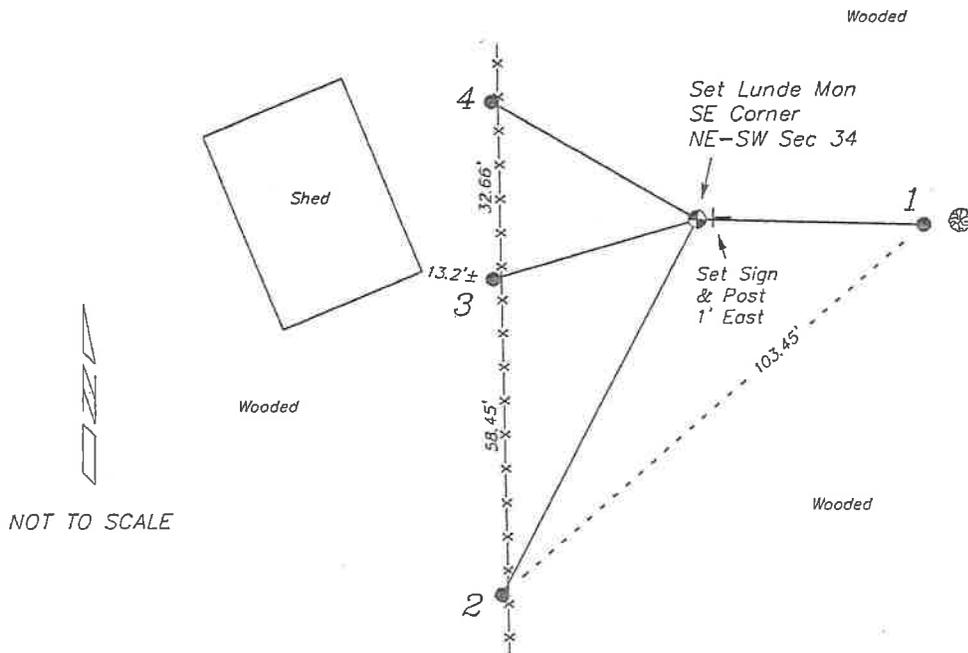

## PLAN VIEW DRAWING OF REFERENCE TIES

Map Showing Distance And Direction To Other Public Land Survey  
Corners Used For Re-Establishing The Corner

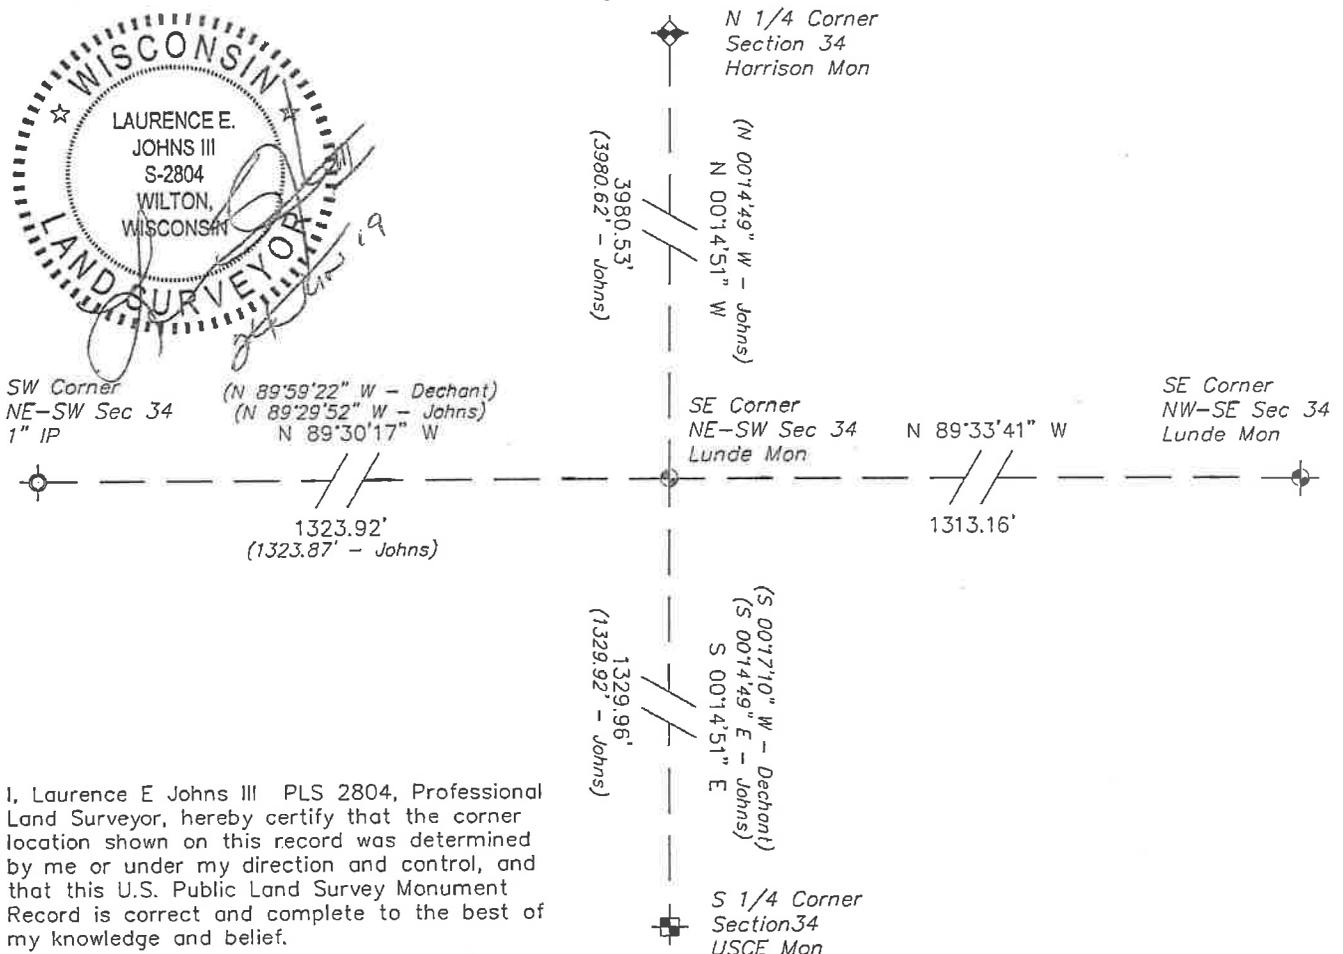

I, Laurence E Johns III PLS 2804, Professional Land Surveyor, hereby certify that the corner location shown on this record was determined by me or under my direction and control, and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.