

**U.S. PUBLIC LAND CORNER  
MAINTENANCE**

# 68

Corner ID: S1/4 Sec. 16, T18N-R1W

21801160020


<u>DATE</u>	<u>CREW</u>	<u>MONUMENT TYPE</u>
October 7, 2019	Zachariah P. Dechant Gary L. Dechant	Did not dig for, nor set monument in busy USH "12". Found existing 1993 reference markers. Approx. 125' SW of "Millston/Black River Falls" sign

References:

	<u>Bearing</u>	<u>Distance</u>
1) Existing 1 1/4" round iron bar, 33' west of USH "12" centerline, east of wide ditch, set old sign	west	25.82' (25.74)
2) Existing 1 1/4" iron pipe, 24' east of USH "12" centerline, pipe is cut at slant	east	31.65' (31.56)
3) Set 1 1/4" x6" iron pipe in marsh grass, set new sign	east	70.90'
4) Set 1"x4" round iron bar, 4' SW of 10" Maple and old sign	N68°24'27"E	102.98'

ASSUMED BEARINGS

Corner & reference markers 1-3 set on straight line.

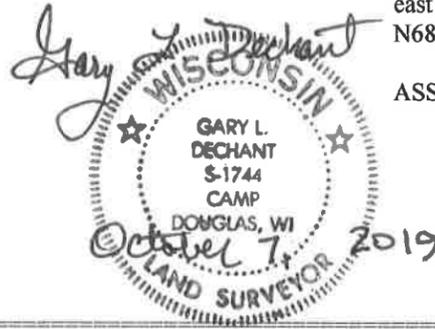

I, Harley A. Sime, do hereby certify that on the 15th day of October 1975, I found ~~(evidence)~~ (no evidence) of the South 1/4 corner of Section 16, T18 N, R1W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 5th day of Feb. 1976.

Harley A. Sime  
County Surveyor  
Title

History of original corner establishment:

See Reverse Side  
For Maintenance

Description of corner evidence found:




Projected the bearing, between the North 1/4 corner of Sec. 16 and the existing Center 1/4 corner of Sec. 16, South and intersected it with the bearing between the S.W. and S.E. corners of Sec. 16. The resulting half mile distances along the South line of Sec. 16 are almost equal.

UPDATE: A resurfacing project was to take place in the summer of 1993. Previous ties were checked and an additional tie was taken. The monument of record was then removed. Following the resurfacing project a 1/4" x 12" round iron bar was set.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:


Witnesses to corner location:

W.C. Jung-Crew Chief W.C. Jung  
A. Lueck

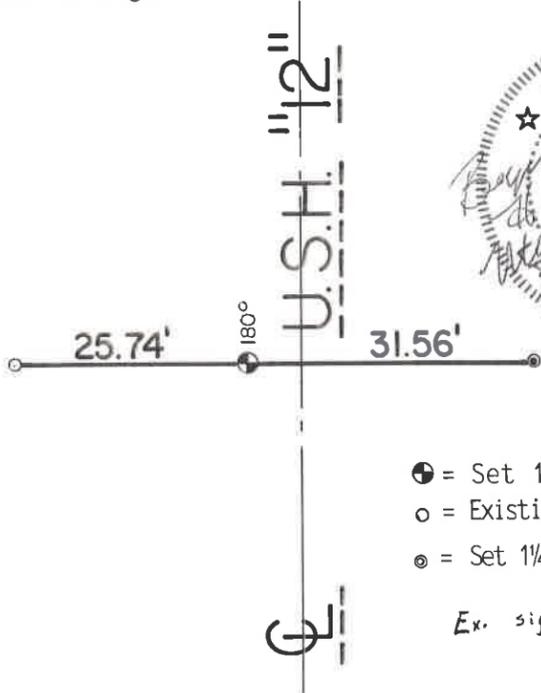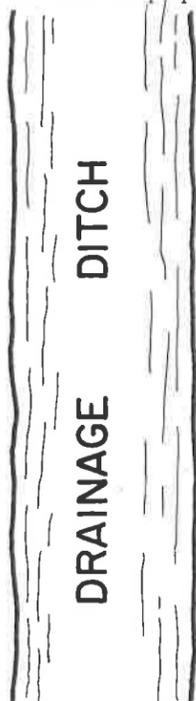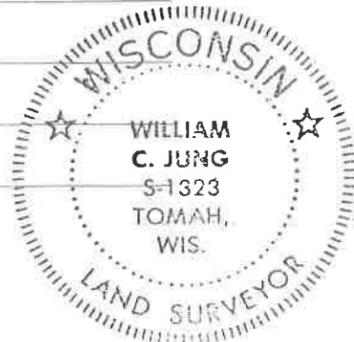

- ⊕ = Set 1/4"x12"round iron bar
- = Existing 1/4" round iron bar
- ⊙ = Set 1/4" x 24" iron pipe

Ex. sign here

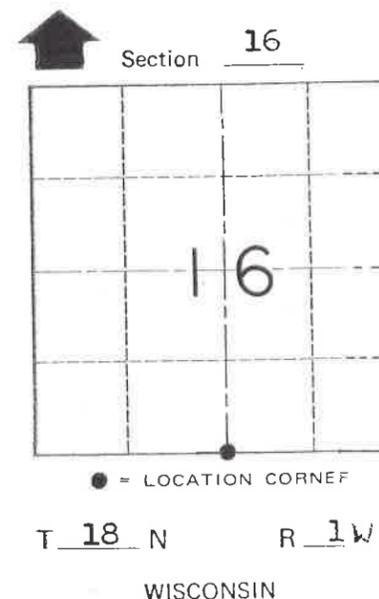

SURVEY CONTROL ORDER

Horizontal	
Vertical	

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

Town La Grange  
County of Monroe

COUNTY SURVEYOR FORM NO. 1

I, Harley A. Sime, do hereby certify that on the 15th day of October 1975, I found ~~(evidence)~~ (no evidence) of the South 1/4 corner of Section 16, T 18 N, R 1 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 5th day of Feb. 1976.

Harley A. Sime  
County Surveyor  
Title

History of original corner establishment:

**See Reverse Side  
For Maintenance**

Description of corner evidence found:

Projected the bearing, between the North 1/4 corner of Sec. 16 and the existing Center 1/4 corner of Sec. 16, South and intersected it with the bearing between the S.W. and S.E. corners of Sec. 16. The resulting half mile distances along the South line of Sec. 16 are almost equal.



Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Set a P.K. nail in S.T.H. "12", 7.2 ft. West of the hwy. centerline, and 4.7 ft. East of the edge of the asphalt.

Witnesses to corner location:

W.C. Jung-Crew Chief W.C. Jung

A. Lueck

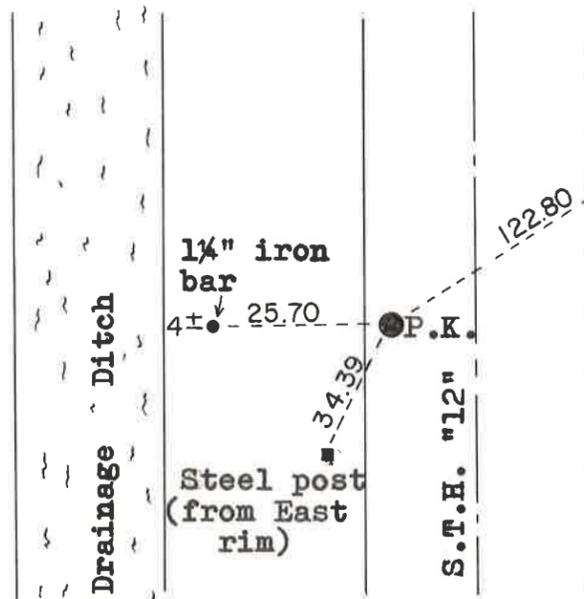

SIGN PLACED 12/16/86  
Mayer, Kenworthy


"Millston & Black River Falls" sign

Replaced P.K. nail With 1/4" x 10 1/2" I.B.

On 2/28/85. Crew: Mayer, Sime T 18 N R 1 W

Comments Bar is down 1"±

N

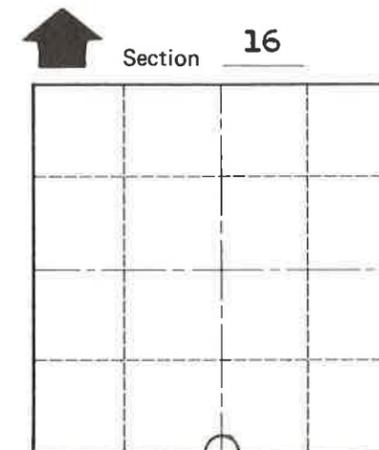

O = LOCATION CORNER

WISCONSIN

COUNTY SURVEYOR FORM NO. 1

SURVEY CONTROL ORDER

Horizontal \_\_\_\_\_  
Vertical \_\_\_\_\_

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

City, Village or Town La Grange

County of Monroe