

CERTIFICATE

I, Nicholas M. Hillmer, do hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Wisconsin.

Dated this 21st day of May, 2013



Nicholas M. Hillmer, P.L.S. 2909
Anderson Engineering of Minnesota, LLC.

CERTIFIED LAND CORNER

History of corner established since Original Government Survey

In 1990 Bryan H. Meyer set a Harrison monument at an occupied fence corner as the best available evidence.

No. 21802092000

Description of evidence found

On January 24th, 2013, Anderson Engineering of Minnesota located the Harrison monument 0.2 feet above grade and 1.0 foot southeast of a witness post with survey marker sign.

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:



Witnesses to corner location:

Nick Hillmer
Josh Oslund
Dan Greenwald

MONROE COUNTY
COORDINATE SYSTEM
NAD 1983 (2007)

HARRISON MONUMENT
Northing (Y) 418615.48
Easting (X) 678607.21

Base Station - 22 182W
Northing (Y) 408053.25
Easting (X) 679287.00

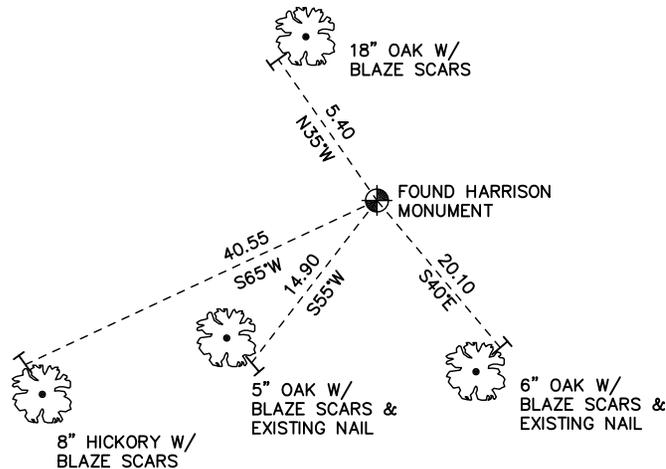

⊙ = LOCATION CORNER
Corner I.D. E 1/4 9
T 18 N R 2 W
Town of Greenfield
Monroe County, WI.

All distances are shown in U.S. Survey Feet.
Ties are to 60D nails set in trees.
Bearings are for tie reference purposes only.
Coordinates were derived from RTK GNSS procedures.

CERTIFICATE

I, Bryan H. Meyer, do hereby certify that on the 9th day of October 19 90, I found (evidence) ~~XXXXXXXXXX~~ of the West 1/4 corner of Section 10, T 18 N, R 2 W Fourth Principal Meridian, and I re-established said corner according to the Wisconsin Statutes as shown and described hereon.

Dated this 26th day of Dec. 19 90.

Bryan H. Meyer

Deputy County Surveyor

CERTIFIED LAND CORNER

History of corner establishment since Original Government Survey


O. R. Dahl was here in April of 1871.

Description of corner evidence found:

I accepted the occupied fence corner as the best available evidence.

No. 37

21802092000



H. A. Sime and Associates
P. O. Box 705
Tomah, Wisconsin 54660
Phone: (608)-372-5392


COUNTY SURVEYOR FORM NO. 1

Description of corner and witness monuments, references and accessories used to perpetuate the original or re-established location of this corner:

Crew: Meyer, Kenworthy
Date: October 9, 1990
Weather: Sunny, Windy, 45°±
Witnesses to corner location:



John Kenworthy

Bryan H. Meyer

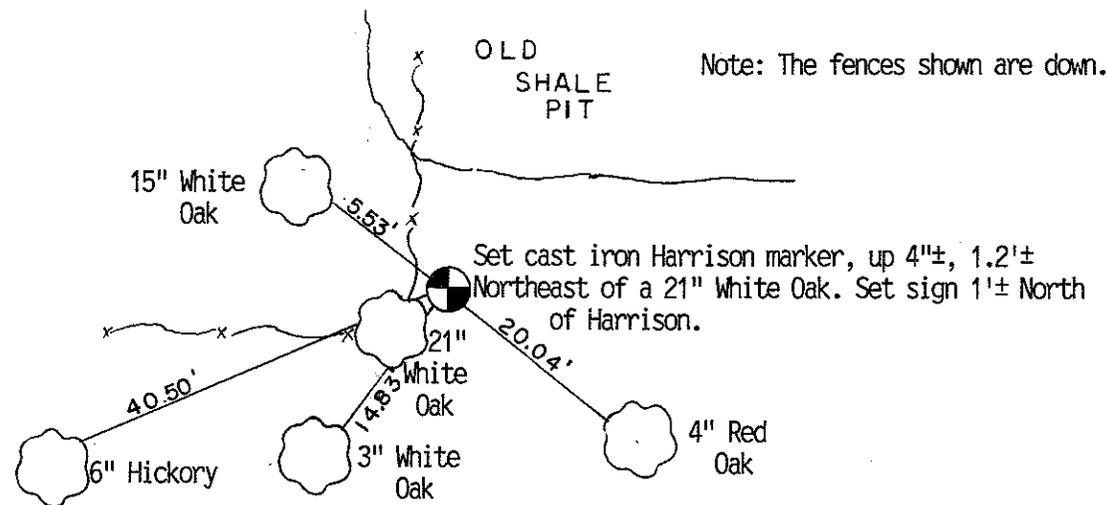

Drawing by: John Kenworthy

NOTE: The trees shown hereon (except the 21" White Oak) are double blazed; the distance to each is to a nail set in a hack in the side of each tree.

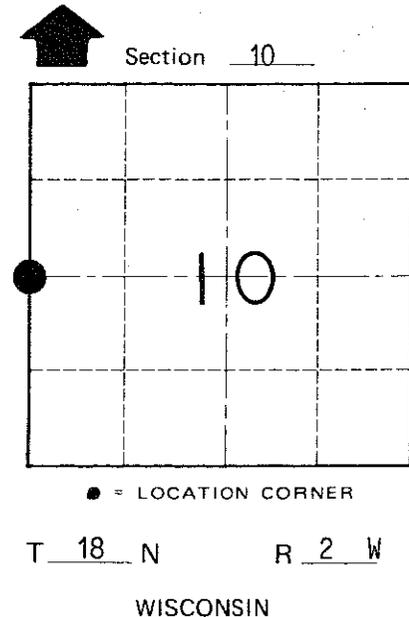

SURVEY CONTROL ORDER

Horizontal	_____
Vertical	_____

WISCONSIN COORDINATE SYSTEM

Corner	East (X)	North (Y)	Elevation (Z)	Zone
Control Sta. Name				

~~City/Village~~ Town of Greenfield

County of Monroe